



pure acoustics[®]





pure acoustics[®]





Multi Zone Amplifiers

100W 2-Zone Stereo Amplifier

- With Independent Volume Control for Each Zone; Subwoofer Output, and Optical Input
- 2 Active subwoofer outputs for wide and deep sound dispersion
- CLASS-D amplification
- Multiple connection options: BT / USB / AUX / FM RADIO / COAX / OPTICAL
- Smart DSP
- 2-band equalizer to control bass/treble
- PRE OUT output allows connection of an additional amplifier, expanding the sound system
- Dual microphone input: Priority input lowers music during announcements; includes an ECHO effect on both mics
- Illuminated LCD display: Shows operating status, volume, and real-time data

Specifications:

- Total power: 100W RMS
- Power per zone: $4\Omega = 75W$ RMS | $8\Omega = 50W$ RMS
- Number of zones: 2
- Subwoofer output: 2 active
- Frequency response: 20Hz–20kHz ± 1 dB
- Minimum impedance: 4Ω
- Total harmonic distortion (THD): <0.1% at standard listening levels
- Dimensions: 29x22x9.8 cm

ZONE PILOT-2



300W 2-Zone Stereo Amplifier

- With Independent Volume Control for Each Zone; Subwoofer Output, and Optical Input
- 2 Active subwoofer outputs for wide and deep sound dispersion
- Passive subwoofer output that includes separate volume control (100W RMS)
- CLASS-D amplification
- Receiver is compatible for mounting in a 2U, 19" RACK cabinet
- Multiple connection options: BT / USB / AUX / FM RADIO / COAX / OPTICAL
- Smart DSP
- 2-band equalizer to control bass/treble
- PRE OUT output allows connection of an additional amplifier, expanding the sound system
- Dual microphone input: Priority input lowers music during announcements; includes an ECHO effect on both mics
- Illuminated LCD display: Shows operating status, volume, and real-time data
- Suitable for installation in a communications rack

ZONE PILOT-2 PRO



Specifications:

- | | |
|---|---|
| <ul style="list-style-type: none"> Total power: 200W RMS + 100W Subwoofer Power per zone: $4\Omega = 150W$ RMS $8\Omega = 100W$ RMS Number of zones: 2 Subwoofer outputs: 2 active + 1 passive Frequency response: 20Hz–20kHz ± 1dB | <ul style="list-style-type: none"> Minimum impedance: 4Ω Total harmonic distortion (THD): <0.1% at standard listening levels Rack installation: 1U 19" RACK Dimensions: 29x22x9.8 cm |
|---|---|

200W 4-Zone Stereo Amplifier with Independent Volume Control for Each Zone; Active/Inactive Subwoofer Output, and Optical Input

ZONE PILOT-4

- 2 Active subwoofer outputs for wide and deep sound dispersion
- CLASS-D amplification, 50W RMS per zone
- Multiple connection options: BT / USB / AUX / FM RADIO / COAX / OPTICAL
- Smart DSP
- 2-band equalizer to control bass/treble
- PRE OUT output allows connection of an additional amplifier, expanding the sound system
- Dual microphone input: Priority input lowers music during announcements; ECHO effect on both
- Illuminated LCD display: Shows operating status, volume, and real-time data

Specifications:

- Total Power: 200W RMS
- Power per Zone: $4\Omega = 75W$ RMS $\times 4$ | $8\Omega = 50W$ RMS $\times 4$
- Frequency Response: 20Hz–20kHz ± 1 dB
- Minimum Impedance: 4Ω
- Total Harmonic Distortion (THD): Less than 0.1% at standard listening levels
- Dimensions: 35 x 26 x 9.8 cm



500W 4-Zone Stereo Amplifier with Independent Volume Control for Each Zone; Active/Inactive Subwoofer Output, and Optical Input

ZONE PILOT-4 PRO

- 2 Active subwoofer outputs for wide and deep sound dispersion
- Passive subwoofer output that includes separate volume control (100W RMS)
- CLASS-D amplification, 100W RMS per zone
- Receiver is 2U, 19" RACK cabinet mounting-compatible
- Multiple connection options: BT / USB / AUX / FM RADIO / COAX / OPTICAL
- Smart DSP
- 2-band equalizer to control bass/treble
- PRE OUT output allows connection of an additional amplifier, expanding the sound system
- Dual microphone input: Priority input lowers music during announcements; includes ECHO effect on both
- Illuminated LCD display: Shows operating status, volume, and real-time data
- Suitable for installation in a communications rack

Specifications:

- Total Power: 400W RMS + 100W SUBWOOFER
- Power per Zone: $4\Omega = 150W$ RMS | $8\Omega = 100W$ RMS
- Number of Zones: 4
- Subwoofer Outputs: 2 active + 1 passive
- Frequency Response: 20Hz–20kHz ± 1 dB
- Minimum Impedance: 4Ω
- Total Harmonic Distortion (THD): Less than 0.1% at standard listening levels
- Rack Installation: 1U | 19" RACK
- Dimensions: 48.2 x 36.5 x 9.8 cm



1000W 4-Zone Stereo Amplifier with Independent Volume Control for Each Zone; Subwoofer Output, and Optical Input

ZONE PILOT-4 ULTRA

- 2 Active subwoofer outputs for wide and deep sound dispersion
- Passive subwoofer output that includes separate volume control (100W RMS)
- CLASS-D amplification, 100W RMS per zone
- Receiver is 2U, 19" RACK cabinet mounting-compatible
- Multiple connection options: BT / USB / AUX / FM RADIO / COAX / OPTICAL
- Smart DSP
- 2-band equalizer to control bass/treble
- PRE OUT output allows connection of an additional amplifier, expanding the sound system
- Dual microphone input: Priority input lowers music during announcements; includes ECHO effect on both
- Illuminated LCD display: Shows operating status, volume, and real-time data
- Suitable for installation in a communications rack

Specifications:

- Total Power: 800W RMS + 200W SUBWOOFER
- Power per Zone: $4\Omega = 300W$ RMS | $8\Omega = 200W$ RMS
- Number of Zones: 4
- Subwoofer Outputs: 2 active + 1 passive
- Frequency Response: 20Hz–20kHz ± 1 dB
- Minimum Impedance: 4Ω
- Total Harmonic Distortion (THD): Less than 0.1% at standard listening levels
- Rack Installation: 1U | 19" RACK
- Dimensions: 48.2 x 36.5 x 9.8 cm



- RMS 8Ω
- Separate power selector for each zone
- FM radio
- AUX, USB/SD input
- Stereo RCA input
- RCA output allows you to chain an additional amplifier
- Digital display
- 2 Mic inputs
- Separate volume and echo controls
- Bass and treble control
- Suitable for restaurants, cafés, hospitality rooms, offices, gardens, and more

Specifications:

Power: 50W (300W per channel)
 Impedance: 4Ω–8Ω
 Frequency Range: 40Hz–20kHz ±3dB
 Sensitivity: 93dB ±3dB

Product Dimensions (cm):

(H) 9.6 x (W) 35.05 x (D) 19.81



Multi Zone Amplifiers 70/100V Line

AZ-2U-51000

5-Zone Amplifier



2U

- Power: 1000W (RMS)
- Bluetooth
- Supports connection to DC-24V for backup battery operation
- 2 Speaker connection options: transformer or standard 4Ω–16Ω
- Bass and treble volume control
- CLASS AB amplifier
- 2 Mic inputs for PA
- Individual mic volume control
- AUX RCA input • USB / SD input
- RCA output for connecting an additional amplifier
- FM radio • Digital LED display

Dimensions (cm): 48.3 x 45 x 8.8

AZ-2U-5700

5-Zone Amplifier



2U

- Power: 700W (RMS)
- Bluetooth
- Supports connection to DC-24V for backup battery operation
- 2 Speaker connection options: transformer or standard 4Ω–16Ω
- Bass and treble volume control
- CLASS AB amplifier
- 2 Mic inputs for PA
- Individual mic volume control
- AUX RCA input • USB / SD input
- RCA output for connecting an additional amplifier
- FM radio • Digital LED display

Dimensions (cm): 48.3 x 45 x 8.8

AZ-2U-5500

5-Zone Amplifier



2U

- Power: 500W (RMS)
- Bluetooth
- Supports connection to DC-24V for backup battery operation
- 2 Speaker connection options: transformer or standard 4Ω–16Ω
- Bass and treble volume control
- CLASS AB amplifier
- 2 Mic inputs for PA
- Individual mic volume control
- AUX RCA input • USB / SD input
- RCA output for connecting an additional amplifier
- FM radio • Digital LED display

Dimensions (cm): 48.2 x 31 x 8.8

AZ-2U-5360

5-Zone Amplifier



2U

- Power: 240W (RMS)
- Bluetooth
- Supports connection to DC-24V for backup battery operation
- 2 Speaker connection options: transformer or standard 4Ω–16Ω
- Bass and treble volume control
- CLASS AB amplifier
- 2 Mic inputs for PA
- Individual mic volume control
- AUX RCA input • USB / SD input
- RCA output for connecting an additional amplifier
- FM radio • Digital LED display
- Overheat protection mechanism

Dimensions (cm): 48.2 x 31 x 8.8

AZ-2U-5240

5-Zone Amplifier



2U

- Power: 240W (RMS)
- Bluetooth
- Supports connection to DC-24V backup battery operation
- 2 Speaker connection options: transformer or standard 4Ω–16Ω
- Bass and treble volume control
- CLASS AB amplifier
- 2 Mic inputs for PA
- Individual mic volume control
- AUX RCA input • USB / SD input
- RCA output for connecting an additional amplifier
- FM radio • Digital LED display
- Overheat protection mechanism

Dimensions (cm): 48.3 x 35 x 8.8

AZ-2U-1120

1-Zone Amplifier



2U

- Power: 120W (RMS)
- Bluetooth
- Supports connection to DC-24V backup battery operation
- 2 Speaker connection options: transformer or standard 4Ω–16Ω
- Bass and treble volume control
- CLASS AB amplifier
- 2 Mic inputs for PA
- Individual mic volume control
- AUX RCA input • USB / SD input
- RCA output for connecting an additional amplifier
- FM radio • Digital LED display
- Overheat protection mechanism

Dimensions (cm): 40 x 27 x 6.6

Features

- WiFi: IEEE802.11 b/g/n 2.4G
- LAN: 10/100M RJ45
- Bluetooth: 5.0
- Streaming Protocol: WiFi, AirPlay, Spotify Connect, DLNA, UPnP
- Audio Input: Optical, Coaxial, Mic, RCA, USB
- Online Music Services: Spotify, Amazon Music, Tidal, Qobuz, Tuneln, BBC Radio, Internet Radio, iHeart Radio, Radio Paradise, Napster.

Specifications:

Speaker Power
Stereo: 100Wx2 @4Ω / 60W x2@8Ω
Mono: 200W @2Ω
Speaker Impedance: 4 - 8Ω
Amplifier Chip: TPA3255
Frequency Response: 20Hz - 20kHz
THD+N/SNR: 0.03% / 91dB
DAC: ESS Sabre ES9023P

**4 Zone Network Audio Amplifier****Features**

- Support 4 zone, 4* 50W per Zone
- Support WIFI 2.4G, Bluetooth, Airplay
- Support built-in MIC function
- Support LINE IN, OPTICAL, HDMI, RCA, COAXIAL, USB
- Support SUB out, speaker out, pre out
- Support 2*LAN (10/100Mbps Ethernet access)
- Support the operation of each zone controlled by the PC, including the user EQ customization of each zone
- Support 4 zone broadcast and single zone broadcast
- Support APP interconnection control
- Support Spotify, Bluetooth multi-room playback
- Support DLNA, AirPlay, iHeartRadio, Spotify, TIDAL, Napster, Qobuz, Amazon Music, QQ music, Online Radio etc.
- 433MHz remote control, Wireless Remote Control-360-degree direction signal technology-8M coverage.

**Specifications:**

Power: AC 110-240V / 50/60Hz
Control Interface: USB Type C
Remote
Size: 2U rack size

Hi-Fi WiFi Bluetooth Audio Streamer**Features**

- Wi-Fi protocol: IEEE 802.11 a/b/g/n/ac 1x1 dual band WiFi 2.4 GHz and 5GHz
- Bluetooth protocol: Bluetooth 5.4
- Support WiFi/Bluetooth/HDMI (ARC) input/U disk playback
- Support 10/100Mbps Ethernet access
- Support Line output / Lan output / Optical output
- Support APP interconnection control
- Support HTTP/HTTPS protocol
- Support Airplay/DLNA/Qplay streaming media protocol
- Support Airplay, App multi-room playback etc.
- Support Spotify, Tidal, Yandex Music, YouTube music, Apple Music, Qobuz, Tuneln, vTuner etc.
- Support common lossless audio format decoding, up to 192kHz/32bit format
- Support MP3/AAC/FLAC/ALAC/WMA/WAV/APE/AIF/AIFF/AIFC/OGG etc.
- Support NEC infrared remote control

Specifications:

Audio input: Network / Bluetooth 5.4 / TV in / USB Disk
Audio output: Line out / Optical out / Lan out
Ethernet in: RJ45
Music sources: Streaming protocol, Online Music, Multiroom function.
Power: 5V- 2A
Frequency response: 20Hz-20kHz
HD: 0.03%
SNR: >95db
Dimension: 120mmx120mmx43mm



Digital Stereo Amplifiers

Digital Stereo Receiver A/B with Subwoofer Output – 400W

MAESTRA AV5022

- Powerful Output: 400W RMS (4 x 100W); ideal for both commercial and home installations
- Built-in DSP Processor delivers clean and balanced sound at any volume
- CLASS D amplifier: high energy efficiency with low heat emission
- Integrated Bluetooth wireless streaming from any compatible device
- Dual zone (A/B) allows you to manage two independent audio zones
- Built-in FM radio
- Remote control allows for convenient operation of all functions
- Compact design suitable for electrical cabinets, rack mounts, cooling stations, and more



Specifications:

Power Output: 4 x 100W RMS
Amplifier Type: Class D with DSP processor
Microphone Inputs: MIC1 & MIC2 (front panel)
Digital Inputs: Optical, Coaxial, DAC
Analog Inputs: PHONO, CD, AUX
Outputs: Speaker outputs A & B, active subwoofer output
Frequency Response: 20Hz – 20kHz

Total Harmonic Distortion (THD): <0.1% @ 1W

Power Consumption (Max): 180W

FM Antenna: Built-in connector

Front Panel Controls: Source selection, zone selection, tone, volume

Remote Control: IR remote included

Power Supply: 110V – 240V AC, 50/60Hz

Dimensions: 12 x 25 x 31.5 cm (H x W x D)

Weight: 1.4 kg

Digital Stereo Receiver A/B with Subwoofer Output – 800W

MAESTRA AV5026

- Powerful output: 800W RMS (4x200W); ideal for commercial and home installations
- Built-in or internal for all NOVAX DSP processor delivers clean and balanced audio at any volume
- CLASS D amplifier: high efficiency with low heat dissipation
- Integrated Bluetooth wireless streaming from any compatible device
- Dual zone (A/B): allows you to manage two independent audio zones
- Built-in FM radio
- Remote control allows for convenient operation of all functions
- Compact design suitable for electrical cabinets, shelf units, and cooling stations



Specifications:

Power: 4 channels x 200W RMS
Amplifier type: Class D with DSP processor
Microphone inputs: MIC1 and MIC2
Digital inputs: HDMI IN, HDMI OUT ARC, optical, coaxial, DAC
Analog inputs: PHONO, CD, AUX
Outputs: PRE OUT, AMP IN, Active Subwoofer Out
Frequency response: 20Hz – 20kHz

Total harmonic distortion (THD): <0.1% @ 1W

Maximum power consumption: 380W

FM antenna: built-in connector

Front panel controls: Source selection, Zone selection, Tone, Volume

Remote control: IR remote included

Operating voltage: 230V, 50Hz

Dimensions: H 6.5 cm x W 17.5 cm x D 27 cm

Weight: 1.4 kg

Stereo Amplifiers

Compact Stereo Amplifier MAESTRA AV2096

2.2 Channels 2 Channels (4Ω–8Ω) 2x500W



- Digital DSP circuit
- Bluetooth
- Optical input
- FM radio
- Subwoofer output
- AUX, USB/FL3.5 Input
- Stereo RCA input
- RCA output allows you to chain an additional amplifier
- Digital display
- 2 Mic inputs (with voice priority)
- IR Remote control
- Bass and treble control
- Color: White

Specifications:

Audio Power: 100W RMS
Frequency Response: 40Hz–20kHz ±3dB
Sensitivity: 93dB ±3dB
Impedance: 4Ω–8Ω
Copper Transformer
Product Dimensions: 249 x 190 x 88 mm
Warranty: 1 Year

Dimensions (cm):

24.9 x 19 x 8.8

Compact Stereo Amplifier MAESTRA AV2095

2.2 Channels 2.2 Channels (4Ω–8Ω) 2x50W



- Digital DSP circuit
- Bluetooth
- Optical input
- FM radio
- Subwoofer output
- AUX, USB/FL3.5 Input
- Stereo RCA input
- RCA output allows you to chain an additional amplifier
- Digital display
- 2 Mic inputs (with voice priority)
- IR Remote control
- Bass and treble control
- Color: Black

Specifications:

Audio Power: 100W RMS
Frequency Response: 40Hz–20kHz ±3dB
Sensitivity: 93dB ±3dB
Impedance: 4Ω–8Ω
Copper Transformer
Product Dimensions: 249 x 190 x 88 mm
Warranty: 1 Year

Dimensions (cm):

24.9 x 19 x 8.8

Compact Stereo Amplifiers

Professional Mini-Digital Amplifier with Built-in Mixer

MINIPRO-60 | 120

Power:

60W | 120W

Features:

- Advanced CLASS D digital amplifier: high energy efficiency and minimal heat dissipation
- Integrated mixer
- Backup function for PA announcements and music playback
- Suitable for use with line transformer speakers and high-quality
- Supports emergency systems; connection for emergency alerts
- Compact 1U design for space saving and easy installation
- Full sound adjustment with bass/treble control
- Expandable to an additional amplifier via PRE-OUT
- Flexible connectivity: BT, USB, RCA
- Three mic inputs (2 balanced XLR + 1 unbalanced)



Specifications:

Power: 120W / 240W

Audio outputs:

Constant voltage: 100V

Fixed impedance: 4Ω–16Ω

Microphone inputs:

MIC1: unbalanced, 600Ω, 10mV

MIC2 / MIC3: balanced XLR, 600Ω, 10mV

Line inputs: AUX1 / AUX2 unbalanced, 10kΩ, 300mV

Auxiliary output: 0.775V (0dB)

Frequency response: 60Hz – 20kHz ±3dB

Total harmonic distortion (THD): <0.5% @ 1kHz

Signal-to-noise ratio:

Line inputs: >80dB

Microphone inputs: >65dB

Output stability: <3dB difference between no-load and full-load

Tone control:

Bass: 100Hz ±10dB

Treble: 10kHz ±10dB

Operating voltage: AC 100V–240V, 50/60Hz

Dimensions: 28.6 × 21.5 × 7 cm

Professional 1U Digital Amplifier

KLANG 120 | 240 | 360 | 480 | 660

with Built-in Mixer

Power:

120W | 240W | 360W | 480W | 660W

Features:

- Advanced Class D digital amplifier in a compact 1U design Integrated mixer and ALARM function for PA announcements and music playback
- Suitable for extended commercial use with line transformer speakers
- Dual functionality as a passive subwoofer-amplifier for deep and precise bass
- Advanced protection with smart circuits and built-in safety mechanisms against short circuits, overload, and high temperature
- Full sound adjustment with separate bass and treble control
- Expandable with an additional amplifier via PRE-OUT
- Various connectivity options: BT, USB, RCA
- Three microphone inputs (including balanced XLR connection)



Specifications:

Power Output: 120W / 240W / 360W / 480W / 660W

Audio Outputs:

100V constant voltage

Fixed impedance: 8Ω–16Ω

Microphone Inputs:

MIC1 / MIC2: Unbalanced, 600Ω, 10mV

MIC3: Balanced (XLR), 600Ω, 10mV

Line Inputs: AUX1 / AUX2: Unbalanced, 10kΩ, 300mV

Auxiliary Output: 0.775V (0dB)

Frequency Response: 60Hz – 20kHz (±3dB)

Total Harmonic Distortion (THD): <0.5% at 1kHz, with 1/3 nominal load

Signal-to-Noise Ratio (SNR):

Line inputs: >80dB

Microphone inputs: >65dB

Output Stability: <3dB difference between static and full load

Tone Control:

Bass: 100Hz (±10dB)

Treble: 10kHz (±10dB)

Power Supply: AC 100V–240V, 50/60Hz

Dimensions (WxDxH): 48.2 × 20.7 × 5 cm

Professional 100W RMS Wall-Mount Stereo Amplifier

- Professional stereo amplifier with 100W RMS premium-quality output
- Mic input, AUX input, digital optical input, and dedicated subwoofer output
- Bluetooth connectivity for direct music playback from mobile devices
- Support for direct playback from USB media
- Customizable EQ control with built-in equalizer
- Compact wall-mount design saves space and allows easy installation
- Precise control via smart DSP
- Multi-zone support: can be integrated into multi-room audio systems
- Convenient remote control via dedicated remote/compatible app

Specifications:

Power Output: 100W RMS

Inputs Microphone: 3 mV–5 mV, AUX 200 mV–300 mV

Outputs: 2x75W @ 8Ω, 2x75W @ 4Ω

Frequency Response: 25 Hz–20 kHz ±3 dB

Equalizer Bass: 100 Hz ±10 dB, Treble 10 kHz ±10 dB

Total Harmonic Distortion (THD): ≤0.1% @ 1 kHz 0 dB output

Signal-to-Noise Ratio (SNR): ≥70 dB

Operating Voltage: DC-24 V / 3-A

Dimensions: 13.6 x 4.6 x 15 cm



80W Compact 2.1 Channel Stereo Amplifier

- Digital DSP circuit for high-quality sound processing
- Bluetooth capable
- Optical input: digital connection on back console for TVs, game consoles, etc.
- Sub-output connection for active subwoofers
- Built-in FM Radio digital tuner with memory for up to 40 stations
- USB connection for memory cards
- Multiple connections: 3.5mm PL input, AUX, and wireless BT
- Two 6.3mm PL inputs for up to 2 microphones
- Voice priority function
- Digital display shows amplifier status, radio stations, and currently playing track
- Separate treble, bass, and master volume controls for precise sound adjustment
- IR remote control
- Powered by copper transformer for high-quality, stable sound with no interference or distortion

Specifications:

Power: SMR W08 (40W per channel)

Frequency Response: 20Hz–20kHz ±1dB

Impedance Range: 4Ω–16Ω

Dimensions (cm):

24.5 x 20.5 x 11.5 cm



Stereo Amplifier for Installation

Mini stereo-amplifier with built-in mounting bracket, suitable for installation on a wall, ceiling, or under the counter. The AV-502 has a 12V connection also suitable for use with a battery as a car stereo/public address system.

- Detachable mounting bracket
- 2 Speaker outputs with 4Ω–8Ω impedance
- LCD display
- Bluetooth 5.0
- 2 Microphone inputs, with separate volume control for each channel
- 4 connection options: BT / RCA / USB / SD CARD

Specifications:

Power: 50W per channel

Frequency response: 30Hz–20kHz

Microphone frequency response:

100Hz–20kHz

Impedance range: 4Ω–8Ω

Dimensions (cm):

15 x 5.2 x 19 cm





Especially suitable for use in public spaces, commercial establishments, restaurants, meeting rooms, lobbies and offices, waiting areas, and service environments. Intended for use in creating a dynamic sound system with reliable control of mics/ amplifier performance.

- PEAK indicator light alerts of excessive volume
- 2 COMBO inputs for LINE/MIC/PHANTOM support various audio sources
- LINE OUT output for chaining another amplifier to expand the system/create subzones
- 5 connection options: SD CARD / USB / RCA / AUX / BT
- Parametric equalizer for precise adjustment of bass and treble according to the speaker's capabilities
- Easy installation with detachable connectors for quick dis/connection from/to speakers
- Metal enclosure with lock (includes 2 copyable keys)
- Power: 50W per channel

Concealed Stereo Amplifier 2x15W

BT- CASE



Features:

- Bluetooth
- USB / SD Card inputs
- AUX Input
- LCD Display
- 5-Band equalizer
- Includes remote control
- FM Radio

Specifications:

- Digital Class D Amplifier
 Power: 40W RMS
 Power Supply: AC 220V 50Hz
 Frequency Range: 20Hz–20kHz
 Impedance: 8Ω
 Transmission Range: >10 meters
 THD: 0.03%
 Dimensions: 7.11 x 11.4 x 5.8 cm



WiFi Amplifier

Stereo Network Amplifier

A-100



Features:

- 0.2 – 1W RMS per Channel with DELO Display, Optical Input, Built-In Phono Preamp, and Microphone Input
- App control; wireless media streaming
- Front OLED display
- Built-in volume knob
- Support for Mic and PHONO (turntable) input
- Up to 200W @ 2Ω bridged mono mode

Specifications:

- Power Output: 60W x 2ch @ 8Ω / 100W x 2ch @ 4Ω / 200W @ 2Ω ONOM
 Minimum Impedance: 4Ω
 Frequency Response: 20Hz – 20kHz
 Total Harmonic Distortion (N+DHT): 0.03%
 Inputs: BT, USB, Optical, RCA, RJ45, PHONO, Coaxial, Microphone
 Output: Line Out
 Dimensions: 24.8 x 21.5 x 6.4 cm
 Weight: 3.9 kg

Public Address Amplifiers

Compact Mixer Amplifier for PA and Music, with 2 Audio Zones

COMPACT-60

Integrated BT, and Mic Inputs



- Supports DC-24V for battery operation ideal for backup, portable use, use in vehicles, outdoor events, and areas without main power
- 2 Microphone inputs with echo effect included
- Bell tone input for announcement of important messages
- AUX input/output (RCA) for easy connection to external audio sources
- USB player, BT, and FM radio combine to offer multiple playback options
- Built-in treble, bass, and master volume controls
- Overload, overheating, and short-circuit protection
- Smart LED display runs 5-segment meter for monitoring output level, including clip and fault indicators
- Dual-zone output supports up to 100V perfect for distributing audio to multiple zones

Specifications:

Power at V001: 60W
Output power at 4Ω: 60W
Frequency response: 50Hz–16kHz ±1dB
THD distortion: <0.1% at normal volume
Impedance range: 4Ω–16Ω
Microphone input: 10mV, 600Ω

Dimensions (cm):

8x24x32 cm

Compact Mixer Amplifier for PA and Music with 2 Audio Zones,

COMPACT-120

Integrated BT, and Mic Inputs



- Supports DC-24V for battery operation ideal for backup, portable use, use in vehicles, outdoor events, and areas without main power
- 2 Mic inputs with echo effect included
- Bell tone input for announcement of important messages
- AUX input/output (RCA) for easy connection to external audio sources
- USB player, BT, and FM radio combine to offer multiple playback options
- Built-in treble, bass, and master volume controls
- Overload, overheating, and short-circuit protection
- Smart LED display runs 5-segment meter for monitoring output level, including clip and fault indicators
- Dual-zone output supports up to 100V perfect for distributing audio to multiple zones

Specifications:

Output power V001: 120W
Output power at 4Ω: 120W
Frequency response: 50Hz–16kHz ±1dB
DHT distortion: <0.1% at normal volume
Impedance range: 4Ω–16Ω
Microphone input: 10mV, 600Ω

Dimensions (cm):

8 x 26.5 x 32 cm

Compact Mixer Amplifier for Public Address and Music with 3 Audio Zones

COMPACT-240

Integrated BT, and Mic Inputs



- Supports connection to DC-24V for battery operation, ideal for backup, portable use, use in vehicles, outdoor events, and areas without main power
- 2 Mic inputs with echo effect
- Bell tone input for announcement of important messages
- AUX input/output (RCA) for easy connection to external audio sources
- USB player, BT, and FM radio combine to offer multiple playback options
- Built-in treble, and bass, and master volume controls
- Overload, overheating, and short-circuit protection
- Smart LED display runs 5-segment meter for monitoring output level, including clip and fault indicators
- Dual-zone output supports up to 100V perfect for distributing audio to multiple zones

Specifications:

Power at V001: 240W
Output power at 4 : 240W
Frequency response: 50Hz–16kHz ±1dB
DHT distortion: <0.1% at normal volume
Impedance range: 4Ω–16Ω
Microphone input: 10mV, 600Ω

Dimensions (cm):

8 x 28.5 x 38 cm

Digital Power Amplifiers

Designed for installation in 2U rack cabinets

Professional PA Amplifier **PAB-2350**

2 Channels, 2x350W at 4Ω



- Power per channel: 450W / 350W / 200W (2Ω / 4Ω / 8Ω)
- Power in BRIDGE MONO: 600W 8Ω / 800W 4Ω
- Amplifier type: CLASS AB
- Channels: 2
- Frequency response: 20Hz–20kHz
- THD (8Ω, 1kHz): >0.05%
- S/N Ratio: <98dB
- Dimensions (W/H/D): 48 × 9 × 41 cm
- Weight: 12 kg
- Indicator lights: Signal, FAULT, Power, CLIP
- XLR / SPEAKON
- Includes metal component for rack installation



Professional PA Amplifier

2 Channels, 2x700W at 4Ω



- Power per channel: 850W / 700W / 400W (2Ω / 4Ω / 8Ω)
- Power in BRIDGE MONO: 1200W 8Ω / 1600W 4Ω
- Amplifier type: CLASS AB
- Channels: 2
- Frequency response: 20Hz–20kHz
- THD (8Ω, 1kHz): >0.05%

PAB-2700

- S/N Ratio: <98dB
- Dimensions (W/H/D): 49 × 9 × 41 cm
- Weight: 13 kg
- Indicator lights: Signal, FAULT, Power, CLIP
- XLR / SPEAKON
- Includes metal component for rack installation

Professional PA Amplifier

2 Channels, 2x1000W at 4Ω



- Power per channel: 1000W / 600W (4Ω / 8Ω)
- Power in BRIDGE MONO: 1600W 8Ω / 2200W 4Ω
- Amplifier type: CLASS AB
- Channels: 2
- Frequency response: 20Hz–20kHz
- THD (8Ω, 1kHz): >0.03%

PAB-1000

- S/N Ratio: <95dB
- Dimensions (W/H/D): 48 × 10 × 45 cm
- Weight: 20.2 kg
- Indicator lights: Signal, FAULT, Power, CLIP
- XLR / SPEAKON
- Includes metal component for rack installation



Professional Power Mixer Amplifiers

2Ω Professional 2-Channel Mixer Amplifier

PMX-2300 | 2500 | 2700

Bluetooth | USB | Microphone Input | CLASS AB Amplification

8Ω - 4Ω - 2Ω

PMX-2300 | PMX-2500 | PMX-2700

Stereo output power 8Ω: 2x200W | 2x300W | 2x400W

Stereo output power 4Ω: 2x300W | 2x500W | 2x700W

Stereo output power 2Ω: 2x500W | 2x800W | 2x1000W

Bridge mono output 8Ω: 600W | 1000W | 1250W

Bridge mono output 4Ω: 1000W | 1300W | 1700W

Amplifier Type: CLASS AB

Channels: 2

Frequency Response: 20 Hz–18 kHz

THD: (8Ω 1 kHz) >0.03%

S/N Ratio: <90 dB

Weight: 10.5 kg

Indicator LEDs: Signal, FAULT, Power, CLIP

Inputs: BT, MIC, USB, XLR

Outputs: XLR, SPEAKON

Dimensions (H/W/D): 8.8 x 48 x 40 cm



2Ω Professional 2-Channel Mixer Amplifier

PMX-21050

Bluetooth | USB | Microphone Input | CLASS H Amplification

CLASS H

8Ω - 4Ω - 2Ω

Power per Channel: 1400 W / 1050 W / 600 W @ 2Ω /

4Ω / 8Ω

Bridge Mono Power: 1750 W @ 8Ω / 2300 W @ 4Ω

Amplifier: Type CLASS H

Channels: 2

Frequency Response: 20 Hz–18 kHz

THD: (8Ω 1 kHz) >0.03%

S/N Ratio: <95 dB

Weight: 13 kg

Indicator LEDs: Signal, FAULT, Power, CLIP

Inputs: BT, MIC, USB, XLR

Outputs: XLR, SPEAKON

Dimensions (H/W/D): 8.8 x 48 x 46 cm



Professional Mixers

4-Channel Artist Mixer

DSP processor with 61 built-in effects | Equalizer | Bass | BT | Recording mode | Headphone output | Volume control via fader

- 2 Mono channels with COMBO input; 1 stereo channel (via 2 PL inputs)
- GAIN control to adjust microphone/instrument impedance and sensitivity
- HI-Z switch for high-impedance instrument connection
- 3-band parametric equalizer for each channel (High/Mid/Low)
- LOW CUT switch to filter out low frequencies
- USB input for playback, recording, and computer connection
- Power supplied from computer or portable charger (not included)
- PHANTOM POWER + V84 switch for condenser microphones
- PEAK indicator LED to warn of excessive volume
- Digital LED display for mixer status
- PAN-control to balance audio between left and right channels

FUSION 4C



6-Channel Artist Mixer

DSP processor with 61 built-in effects | Equalizer | Bass | BT | Recording mode | Headphone output | Volume control via fader

- 4 Mono channels with COMBO input; 1 stereo channel (via 2 PL inputs)
- GAIN control to adjust microphone/instrument impedance and sensitivity
- HI-Z switch for high-impedance instrument connection
- 3-band parametric equalizer for each channel (High/Mid/Low)
- LOW CUT switch to filter out low frequencies
- USB input for playback, recording, and computer connection
- Power supplied from computer or portable charger (not included)
- PHANTOM POWER + V84 switch for condenser microphones
- PEAK indicator LED to warn of excessive volume
- Digital LED display for mixer status
- PAN-control to balance audio between left and right channels

FUSION 6C



Professional 10-Channel Artist Mixer with Subwoofer Output

DSP processor with 99 built-in effects | Equalizer | Bass | BT | Recording mode | Headphone output | TUO BUS | DNES/XF connection | Volume control via fader

- 2 Mono channels XLR+PL; 4 stereo channels (via 2 PL inputs)
- 3-band parametric equalizer for each channel (High/Mid/Low)
- GAIN control to adjust microphone/instrument impedance and sensitivity
- HI-Z switches for high-impedance instrument connections
- LOW CUT switches to filter out low frequencies
- USB input for playback, recording, and computer connection
- Power supplied from computer or portable charger (not included)
- PHANTOM POWER + V84 switch for condenser microphones
- 7-band graphic equalizer
- PEAK indicator LED to warn of excessive volume
- Digital LED display for mixer status
- PAN-control to balance audio between left and right channels

KOBLENZ-10




Professional 12-Channel Artist Mixer with Subwoofer Output

DSP processor with 99 built-in effects | Equalizer | Bass | BT | Recording mode | Headphone output | TUO BUS | DNES/XF connection | Volume control via fader

- 4 Mono channels XLR+PL; 4 stereo channels (via 2 PL inputs)
- 3-band parametric equalizer for each channel (High/Mid/Low)
- GAIN control to adjust microphone/instrument impedance and sensitivity
- HI-Z switches for high-impedance instrument connections
- LOW CUT switches to filter out low frequencies
- USB input for playback, recording, and computer connection
- Power supplied from computer or portable charger (not included)
- PHANTOM POWER + V84 switch for condenser microphones
- 7-band graphic equalizer
- PEAK indicator LED to warn of excessive volume
- Digital LED display for mixer status
- PAN-control to balance audio between left and right channels

KOBLENZ-12



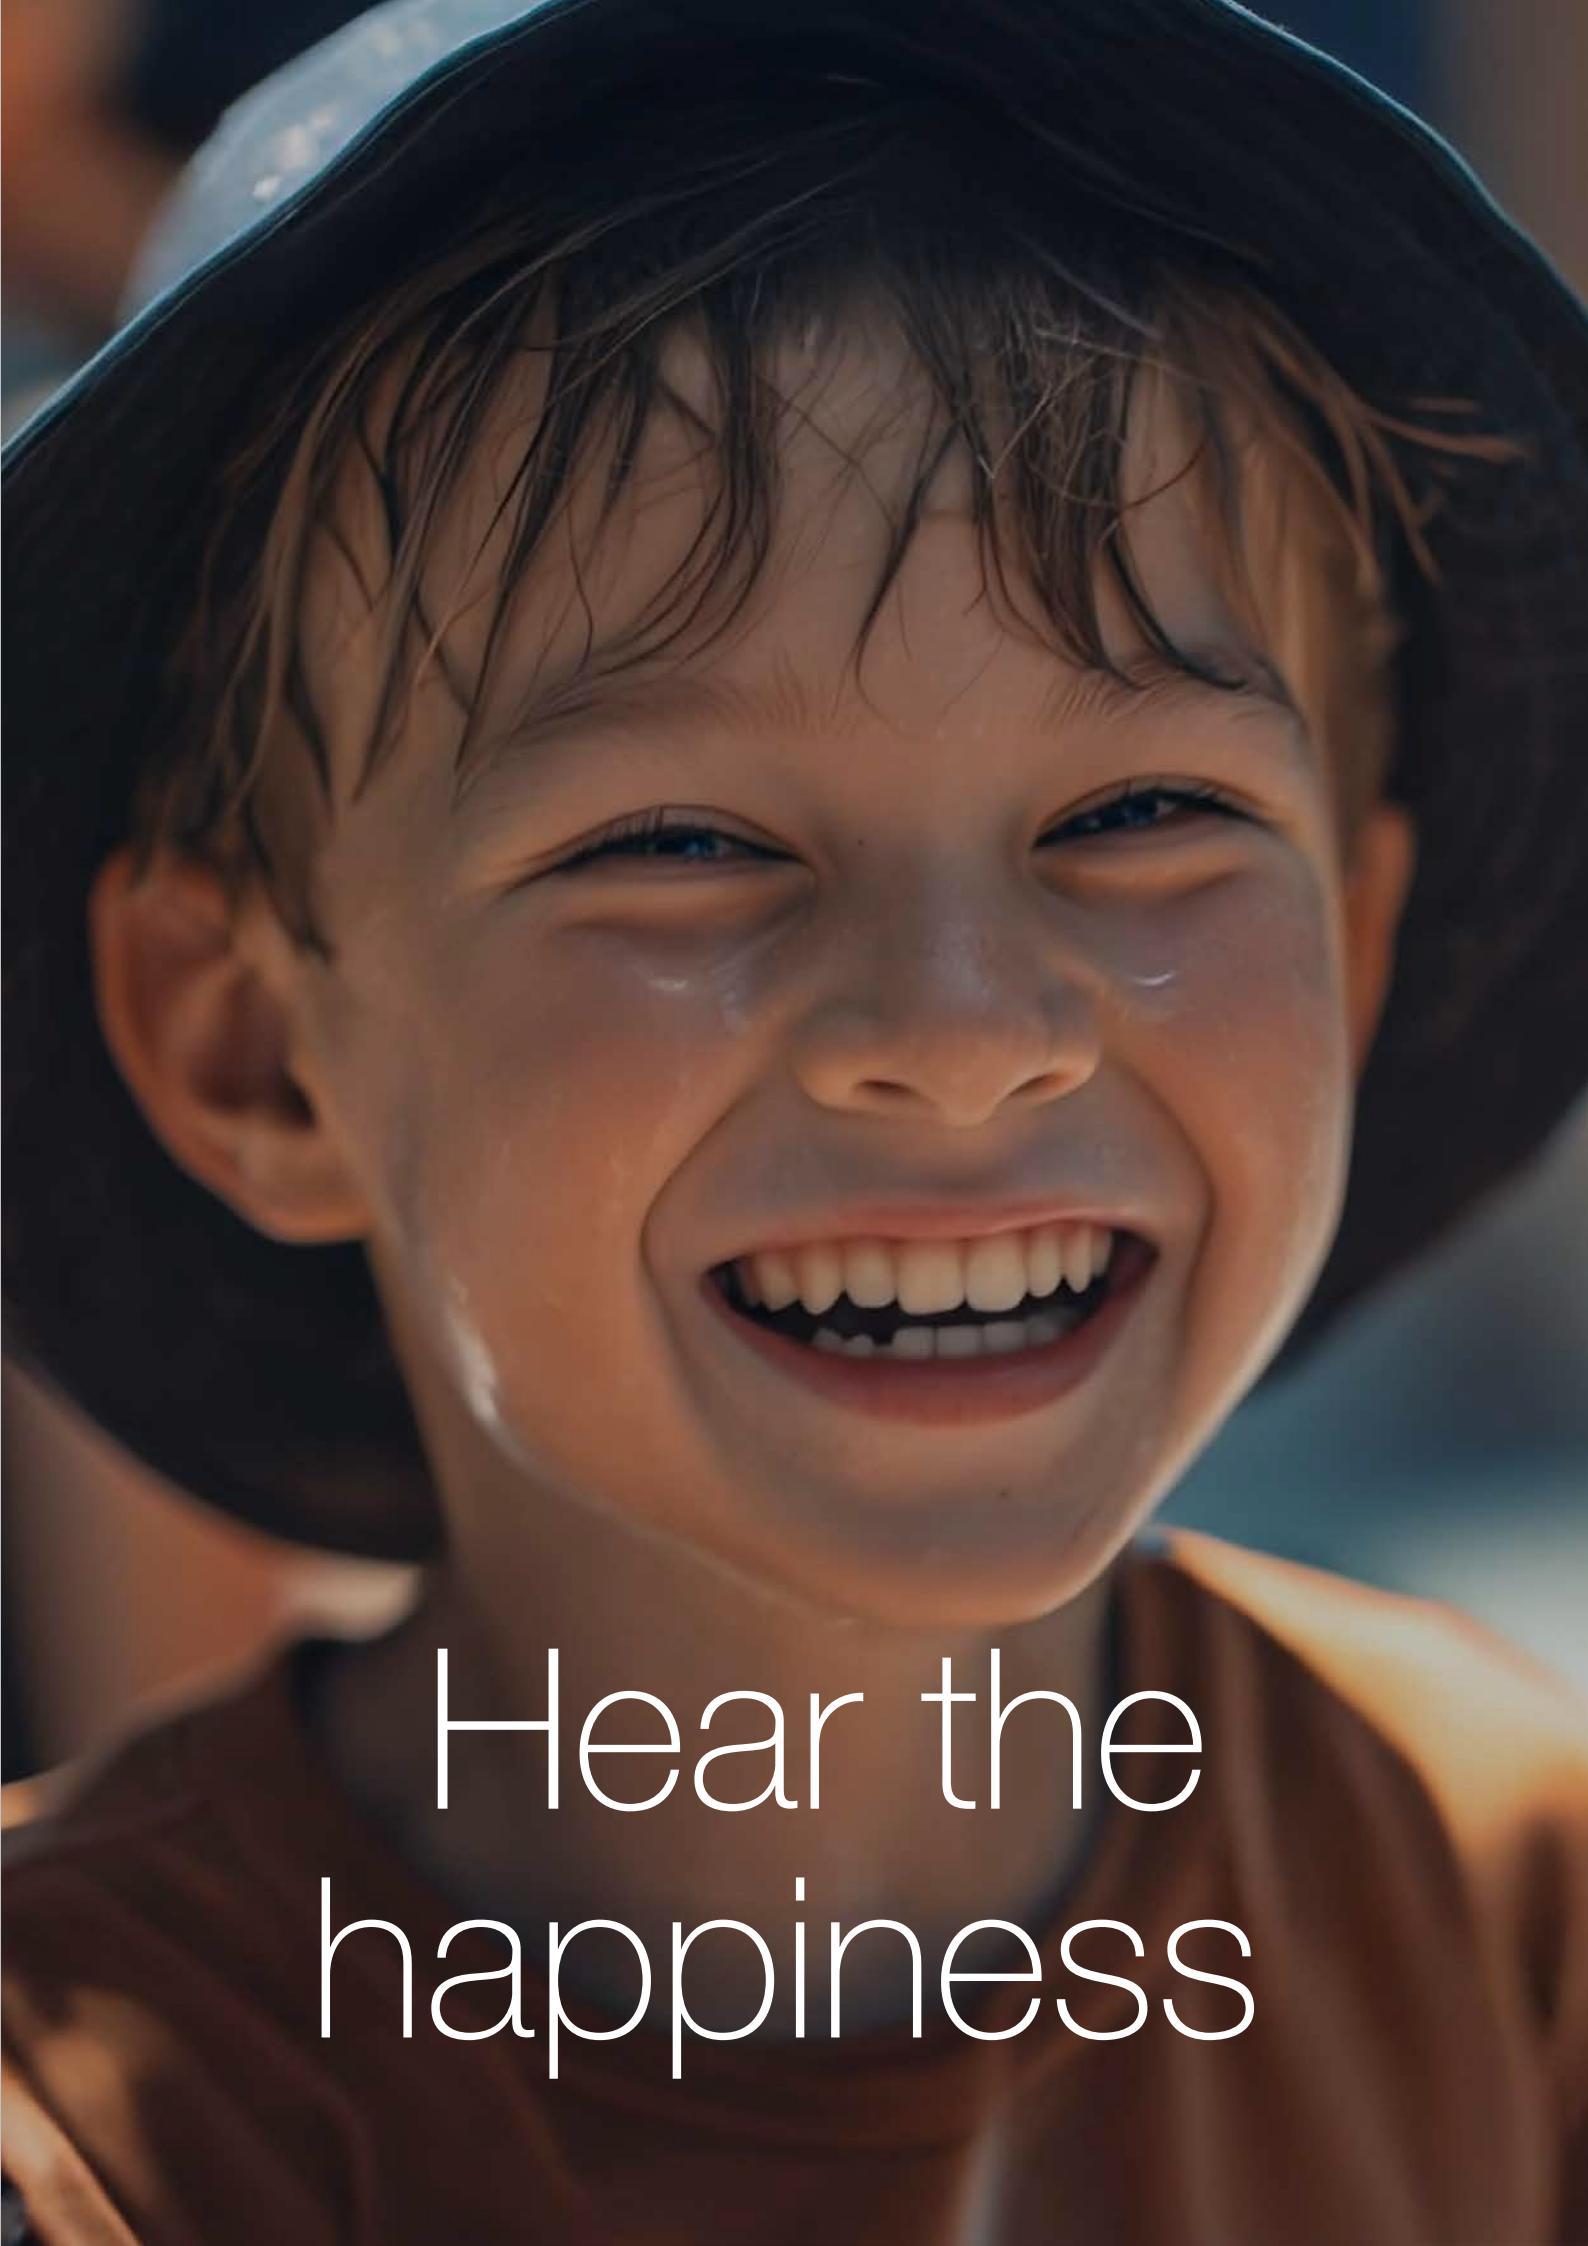

Hear the
happiness



Outdoor Speakers

Outdoor Powered Speakers with TWS (pair)

CALISTO 6



Connect 4 speakers to a single zone!



Specifications

Bluetooth: CSR3008 V5.0

Power: 125W RMS

Woofer: 6.5"

Tweeter: 1" Mylar Dome

Impedance: 8Ω

Frequency Response: 55Hz–20kHz ±3dB

Sensitivity: 89dB ±3dB



Dimensions (cm): 19 × 25.6 × 22.5

Features

- 120×2W speaker
- Dynamic Hi-Fi sound
- New CSR 5.0 Bluetooth streams music at the highest, clearest quality, without distortion or delays
- TWS: Wirelessly connect 2 speakers to a single audio source for a surround-sound experience
- Water-resistant, IPX6 certified; suitable for all weather conditions, including rain, humidity, and sunlight
- Separate bass, treble, and master volume controls for precise sound adjustment
- AUX input for wired connection (smartphones, TVs, set-top boxes, etc.)
- Sealed rear covers protect against water ingress
- UV-protective coating preserves the speaker's finish indefinitely
- Rust-proof aluminum grill
- Adjustable mounting bracket
- Easy installation
- Available in black and white
- Remote control included

4" Water-Resistant Speaker: Indoor/Outdoor

BLYSS V4

Indoor/outdoor speaker with a luxurious design, BASS REFLEX, and aluminum grill for long-lasting durability in harsh conditions. Delivers precise sound in all spaces. Ideal for projects requiring rich, deep sound in public areas, off balconies, in restaurants, VIP rooms, hospitality venues, and more.



- 2-Way speaker with 4" woofer and 1" tweeter
- Durable enclosure with a transparent UV-resistant coating that preserves the original color for years
- IP65 for all weather conditions
- Easy installation with multi-directional mounting bracket (included)
- BASS REFLEX design for enhanced bass frequencies and rich sound

Specifications:

Power: 125W
Frequency Response: 55Hz-20kHz ±3dB
Impedance: 8Ω
Sensitivity: 89dB
Dimensions: 16.5 × 21.2 × 13.5 cm
Weight: 2 kg
Finish: Black or White

5" Water-Resistant Speaker: Indoor/Outdoor

BLYSS V5

Indoor/outdoor speaker with a luxurious design, BASS REFLEX, and aluminum grill for long-lasting durability in harsh conditions. Delivers precise sound in all spaces. Ideal for projects requiring rich, deep sound in public areas, off balconies, in restaurants, VIP rooms, hospitality venues, and more.



- 2-Way speaker with 5" woofer and 1" tweeter
- Durable enclosure with a transparent UV-resistant coating that preserves the original color for years
- IP65 for all weather conditions
- Easy installation with multi-directional mounting bracket (included)
- BASS REFLEX design for enhanced bass frequencies and rich sound

Specifications:

Power: 155W
Frequency Response: 50Hz-20kHz ±3dB
Impedance: 8Ω
Sensitivity: 90dB
Dimensions: 18.5 × 24.2 × 14.5 cm
Weight: 2.2 kg
Finish: Black or White

6" Water-Resistant Speaker: Indoor/Outdoor

BLYSS V6

Indoor/outdoor speaker with a luxurious design, BASS REFLEX, and aluminum grill for long-lasting durability in harsh conditions. Delivers precise sound in all spaces. Ideal for projects requiring rich, deep sound in public areas, off balconies, in restaurants, VIP rooms, hospitality venues, and more.



- 2-Way speaker with 6" woofer and 1" tweeter
- Durable enclosure with a transparent UV-resistant coating that preserves the original color for years
- Speaker with stainless aluminum grill, rated IP65 for all weather conditions
- Easy installation with multi-directional mounting bracket (included)
- BASS REFLEX design for enhanced bass frequencies and rich sound

Specifications:

Power: 185W
Frequency Response: 40Hz-20kHz ±3dB
Impedance: 8Ω
Sensitivity: 92dB
Dimensions (cm): 22 × 29.5 × 17
Weight: 3.6 kg
Finish: Black or white

100W Oval Satellite Speaker – Indoor/Outdoor

BLYSS 603

ARCHITECT
CHOICE!

IP-44



- Stylish 2-Way Oval Speaker
- Amazing sound: 150W power and 8Ω per speaker
- Mounting brackets that allow for full movement and optimal positioning included
- Cloth-covered grill for a smooth, warm appearance,
- Available in white or black finish

Specifications:

Power: 100W
Woofer: 3" Polypropylene
Tweeter: 0.75" Mylar
Impedance: 8Ω
Frequency Response: 45Hz–
20kHz ±3dB
Sensitivity: 90dB ±3dB

Dimensions (cm):

(W) 11, (H) 16, (D) 11.7

5" Outdoor Oval Passive Speaker (pair)

BLYSS 605



Features:

- IP44 resistant to all weather conditions strong sun, moisture, rain, and more
- 2-Way speaker
- 5" woofer, adapted for playing music in open areas and large spaces
- Gilded terminal wrapped in plastic to prevent corrosion
- Easy installation both horizontal and vertical (accessories included)
- Available in black or white finish

Specifications:

Power Output: 150W
Frequency Response: 60Hz-20kHz
Sensitivity: 89dB±2dB
Impedance: 8Ω
Woofer: 5" Polypropylene
Tweeter: 1" Mylar
Product Dimensions: 25.6x16.7x21.8 cm

8" Outdoor Oval Passive Speaker (pair)

BLYSS 608



Features:

- IP44 resistant to all weather conditions strong sun, moisture, rain, and more
- 2-Way speaker
- 8" woofer, adapted for playing music in open areas and large spaces
- Gilded terminal wrapped in plastic to prevent corrosion
- Easy installation both horizontal and vertical (accessories included)
- Available in black or white finish

Specifications:

Power Output: 200W
Frequency Response: 45Hz-20kHz
Sensitivity: 90dB±2dB
Impedance: 8Ω
Woofer: 8" Polypropylene
Tweeter: 1" Mylar
Product Dimensions: 36x24x25.4 cm

Low-Voltage 5.25" Speaker (pair)

BLYSS 55T



Features:

- All-weather
- High-performance 5.25" driver woofer with bass reflex
- Premium UV-coated cabinet prevents discoloration over time
- Supports 100V amplifier (for PA systems and fire alarms)
- Supports 8Ω amplifier (for home audio system)
- Aluminum dome tweeter delivers crystal clear highs
- Anti-rust aluminum grill with swivel logo
- 2-Way, full frequency range speaker configuration
- Unique 12dB crossover
- Simple DIY installation
- Multi-directional mounting brackets included

Specifications:

Power Tappings (100V):
3.75W/7.5W/15W/30W
Rated Power (8Ω): 60W
Frequency Response: 61Hz-20kHz
Sensitivity: 85dB±3dB
Woofer: 5.25"
Aluminum dome tweeter: 1"
Product Dimensions: L27xW19xH20 cm
Weight: 3.3Kg

5.25" 135W Speaker – Indoor/Outdoor

SOUNDBEAT-5



- Rust-proof aluminum grill for durability outdoors
- Precise sound indoors and outdoors
- Elegant and modern design
- 2-Way speaker, 5" woofer, 1" titanium tweeter
- Transparent coating absorbs UV rays and helps maintain original color indefinitely
- IP55 rating
- Easy installation
- Vertical or horizontal mounting (mounting brackets included)
- BASS REFLEX for enhanced bass frequencies and a rich, detailed sound

Specifications

Power: 135W
Frequency Response: 60Hz–20kHz ±3dB
Impedance: 8Ω
Sensitivity: 88dB
Weight: 2.7 kg
Finish: black or white

Dimensions (cm):

16 x 23.5 x 16.3

6.5" 165W Speaker – Indoor/Outdoor

SOUNDBEAT-6



- Rust-proof aluminum grill for durability outdoors
- Precise sound indoors and outdoors
- Elegant and modern design
- 2-Way speaker, 6.5" woofer, 1" titanium tweeter
- Transparent coating absorbs UV rays and helps maintain original color indefinitely
- IP55 rating
- Easy installation
- Vertical or horizontal mounting (mounting brackets included)
- BASS REFLEX for enhanced bass frequencies and rich, detailed sound

Specifications

Power: 165W
Frequency Response: 60Hz–20kHz ±3dB
Impedance: 8Ω
Sensitivity: 92dB
Weight: 2.9 kg
Finish: black or white

Dimensions (cm):

18.5X28X15.2

6.5" Indoor/Outdoor Speakers (pair)

BLYSS 65




- High-quality speaker designed to deliver dynamic and open audio
- Rust-resistant aluminum mesh
- Stainless aluminum grill that meets the highest durability standards
- Speaker rated IP-66; specially designed to withstand all weather conditions including sprinkler systems, water jets, etc.
- Copper connectors protected with a waterproof cover to prevent corrosion
- Mounts for horizontal/vertical installation included
- Perfect for installation at home, in yards, gardens, studios, restaurants, event halls, cafes, educational institutions, PA systems, and parks
- Finish: White

Specifications:

Power: 150W
Woofer: 6.5"
Titanium Tweeter: 1"
Impedance: 8Ω
Frequency response: 50Hz–20kHz ±3dB
Sensitivity: 91dB ±3dB

Dimensions (cm):

(H) 41.5, (W) 27, (D) 2

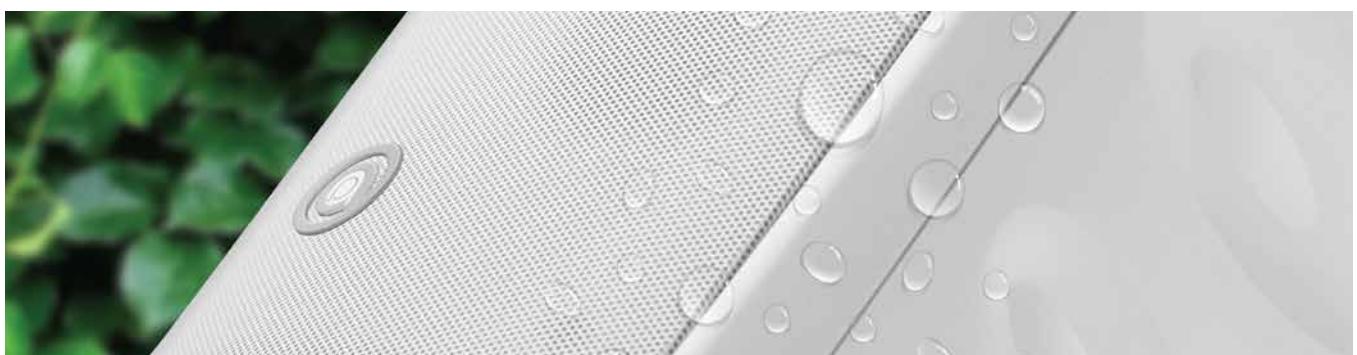

3" Hybrid Water-Resistant Musical Speaker

CLIQ-3

Suitable for both home and professional use, capable of connection to 100V PA amplifiers and can be chained over long distances. A perfect fit for hotels, country clubs, restaurants, warehouses, schools, universities, campuses, hospitals, public gardens, parking lots, military bases, police and fire stations, airports, naval ports, swimming pools and more.



- 8Ω impedance with 80W power
- 2-Way speaker with 3" woofer and 0.5" tweeter
- Durable ABS enclosure that maintains original color for years
- IP66 for all weather conditions
- Mounting via CLICK! system for a quick and easy installation process
- Suitable for operation in extreme temperatures, from -20°C to 60°C

Specifications:

Power: 80W @ 8Ω
Power at 100V: 2.5W / 5W / 10W
Frequency response: 120Hz–20kHz ±3dB
Sensitivity: 81dB
Dimensions: 10.6 x 15 x 11.4 cm
Weight: 835 g
Finish: black or white

5.25" Hybrid Water-Resistant Musical Speaker

CLIQ-5

Suitable for both home and professional use, capable of connection to 100V PA amplifiers and can be chained over long distances. A perfect fit for hotels, country clubs, restaurants, warehouses, schools, universities, campuses, hospitals, public gardens, parking lots, military bases, police and fire stations, airports, naval ports, swimming pools and more.



- 8Ω impedance with 160W power
- 2-Way speaker with 5.25" woofer and 0.5" tweeter
- Durable ABS enclosure that maintains original color for years
- IP66 for all weather conditions
- Mounting via CLICK! system for a quick and easy installation process
- Suitable for operation in extreme temperatures, from -20°C to 60°C

Specifications:

Power: 160W at 8Ω
Power at 100V: 7.5W / 15W / 30W
Frequency range: 85Hz–20kHz ±3dB
Sensitivity: 87dB
Dimensions: 17.5 x 25 x 15.5 cm
Weight: 1.6 kg
Finish: Black or white

5.25" Hybrid Water-Resistant Musical Speaker

CLIQ-6

Suitable for both home and professional use, capable of connection to 100V PA amplifiers and can be chained over long distances. A perfect fit for hotels, country clubs, restaurants, warehouses, schools, universities, campuses, hospitals, public gardens, parking lots, military bases, police and fire stations, airports, naval ports, swimming pools and more.



- 8Ω impedance with 240W power
- 2-Way speaker with 6.5" woofer and 0.5" tweeter
- Durable ABS enclosure that maintains original color for years
- IP66 for all weather conditions
- Mounting via CLICK! system for a quick and easy installation process
- Suitable for operation in extreme temperatures, from -20°C to 60°C

Specifications:

Power at 8Ω: 240W
Power at 100V: 10W/20W/40W
Frequency response: 55Hz–20kHz ±3dB
Sensitivity: 89dB
Dimensions: 21 x 30 x 18.9 cm
Weight: 2.3 kg
Finish: Black or white

5.25" 125W Speakers – Indoor/Outdoor (pair)

BLYSS 05



- IP55 rating: resistant to all weather conditions, strong sunlight, humidity, rain, and more
- 2-Way speakers
- Woofer designed for music playback in open spaces and large areas
- Rust-proof, diamond-patterned aluminum grill
- Plastic-coated terminal prevents corrosion
- Easy installation
- Vertical or horizontal mounting (mounting brackets included)
- Available in black or white finish

Specifications:

Power: 125W RMS
Woofer: 5.25"
Tweeter: 0.5"
Impedance: 8Ω
Frequency Response: 80Hz–20kHz ±3dB
Sensitivity: 88dB ±3dB

Dimensions (cm):

Frame: (H) 25.5 × (W) 17.9 × (D) 15.6
With Mounting Bracket: (H) 26.6 × (W) 17.9 × (D) 18.8

6.5" 150W Speaker – Indoor/Outdoor

BLYSS 06



- IP55 rating: resistant to all weather conditions strong sunlight, humidity, rain, and more
- 2-Way speaker with a woofer designed for music playback in open spaces and large areas
- Rust-proof, diamond-patterned aluminum grill
- Plastic-coated terminal prevents corrosion
- Easy installation
- Vertical or horizontal mounting (mounting brackets included)
- Available in black or white finish

Specifications:

Power: 150W RMS
Woofer: 6.5"
Tweeter: 0.5"
Impedance: 8Ω
Sensitivity: 88dB ±3dB
Frequency Response: 60Hz–20kHz ±3dB

Dimensions (cm):

Frame: (H) 30.8 × (W) 21.3 × (D) 19.1
With Mounting Bracket: (H) 31.95 × (W) 21.3 × (D) 23.06

6.5" Ceiling-Mount Speaker – Includes Line Transformer

GARDEN-60



- Acoustic resonance enclosure ensures uniform sound distribution with in 120° coverage
- Rust-proof aluminum grill
- IP-66 rating
- Specifically designed to withstand wet conditions (sprinklers, water jets, etc.)
- Ideal for installation in high-ceilinged spaces; for projects with high aesthetic requirements
- "Low ceiling" effect compensates for potential frequency loss due to high ceilings; capable of producing natural and accurate sound anywhere
- Perfect for installation in restaurants, bars, shops, meeting rooms, hospitality areas, halls, and more
- Versatile installation options: comes with a set of brackets for hanging, wall mounting, floor mounting, and ground spike installation

Specifications

Power: 120W
Woofer: 6.5"
Frequency Response: 100Hz–20kHz ±3dB
Impedance: 8Ω
Sensitivity: 85dB
Finish: Brown

Dimensions (cm):

20.8X20.8X28

Rock-Style Garden Speakers

BLYSS R8



IP-55

- 2-Way speaker
- IP55 rated
- Designed for outdoor use
- Easy DIY installation
- 180 cm cable
- Finish: gray or brown

Dimensions (cm): 32x28.5x32

Specifications

Power: 200W
Woofer: 8"
Tweeter: 0.5"
Impedance: 8Ω
Frequency Response: 35Hz–20kHz ±3dB
Sensitivity: 88dB ±3dB
Material: Polypropylene

Rock-Style Garden Speakers

BLYSS R6



- IP rating 56 resistant outdoor speaker
- 6.5" woofer designed for music playback in open spaces and large areas
- Shell's natural gray finish blends into garden landscapes seamlessly
- Easy DIY installation

Specifications

Power: 150W RMS
Impedance: 8Ω
Frequency Response: 45Hz–20kHz ±3dB
Sensitivity: 88dB ±3dB

Dimensions (cm): 27x22x22.5

Rock-Style Powered Speakers

BLYSS R8BT



- Powerful 200W, 2-Way speakers
- TWS: Wirelessly connect 2 speakers to a single audio source for a surround-sound experience
- Pair of speakers (active + passive) combine to make a high-quality stereo system for outdoor music playback
- Bluetooth connectivity
- Woofer: 8", Tweeter: 1"
- Dynamic Hi-Fi sound
- Class-D digital amplifier with built-in SDP
- Rock shell design that blends seamlessly into any garden or park
- Water-resistant; IP56 certified
- Transformer: IP67 rated
- Easy DIY installation

Specifications

Bluetooth: 4.2
Power: 200W
Woofer: 8"
Tweeter: 1" Soft Dome
Impedance: 8Ω
Frequency Response: 50Hz–20kHz ±3dB
Sensitivity: 91dB ±3dB

Dimensions (cm):

32 x 28.5 x 32

Mushroom Garden Speaker – IP65 Rated

BLYSS E12



- Outdoor speaker, designed for 360° sound coverage
- Made from professional-grade materials resistant to peeling, rust, scratches, UV rays, and corrosion
- IP65 rating protects against water, dust, and sand
- Supports daisy-chaining up to 100 speakers
- Anti-theft mounting system installs speaker directly into the ground (available separately)

Specifications

Power: 60W
Impedance: 8Ω or Line Transformer
Frequency Response: 60Hz–20kHz
Sensitivity: 90dB ±3dB



A dark, atmospheric forest scene. In the background, a bright lightning bolt strikes down from the sky, illuminating the surrounding trees and creating a dramatic contrast against the dark foliage. The trees are tall and thin, silhouetted against the bright light.

Strike the
Beat



In-Ceiling Speakers


3" In-ceiling speaker

RIFT 013

RIFT 014

ARCHITECT CHOICE!

For a clean look,
the logo can be
removed

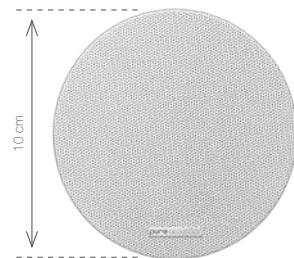

- Ultra-thin grill with 2.5 mm frame
- Ideal solution for bathrooms or small spaces/stereo effect
- ~50W power with balanced sound across a wide frequency range
- Slim magnetic grill for a clean and discreet appearance
- Gold-plated Quick Connect terminals and easy DIY installation

Specifications:

Woofer: 3"
Power: 50W
Impedance: 8Ω
Frequency Response: 120Hz–20kHz ±3dB
Sensitivity: 83dB ±3dB


Dimensions (cm):

External Diameter: 10
Cutout Diameter: 8.6
Depth: 5.25

4" In-ceiling speaker

ARCHITECT CHOICE!

For a clean look,
the logo can be
removed

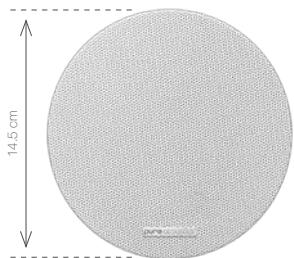

- Ultra-thin grill
- Ideal solution for bathrooms or small spaces/stereo effect
- Slim magnetic grill for a clean and discreet appearance
- Gold-plated Quick Connect terminals
- Quick and easy DIY installation

Specifications:

Woofer: 4"
Power: 80W
Impedance: 8Ω
Frequency Response: 80Hz–20kHz ±3dB
Sensitivity: 83dB ±3dB

Dimensions (cm):

External Diameter: 14.5
Cutout Diameter: 12.5
Depth: 6.7

8" 2-Way In-Ceiling Speaker

RIFT T8

Grill available in black or white



- In-ceiling speaker with ultra-thin magnetic grill
- 2-Way speaker with woofer and dome tweeter
- **Excellent rear speaker solution**
- 12dB crossover for precise frequency balance
- Perforated grill with acoustic fabric for a clean, discreet look and high-quality sound
- Available in two finishes: black or white

Specifications:

Power: 2-Way, 185W
Woofer: 8" | Tweeter: 1" Dome
Impedance: 8Ω
Frequency Response: 30Hz–20kHz
±3dB
Crossover: 12dB ±2dB
Sensitivity: 88dB ±3dB

Dimensions (cm):

External Diameter: 25.4
Cutout Diameter: 22.9
Depth: 8.7

4" 2-Way round In-Ceiling Speakers

RIFT 04



- Ultra-thin grill with acoustic fabric that blends in seamlessly with walls or ceiling
- 2-Way speakers with PP cone woofer for deep bass
- Crossover control for precise frequency balance
- 1.5 cm aesthetic frame for a clean appearance
- Excellent rear speaker solution
- 1.5 cm aesthetic frame

Specifications:

Power: 2-Way, 100W
Woofers: 4" | Tweeter: 1"
Impedance: 8Ω
Frequency Response: 80Hz–20kHz
±3dB
Sensitivity: 88dB ±3dB
Crossover: 12dB ±2dB

Dimensions (cm):

External Diameter: 17
Cutout Diameter: 13.5
Depth: 6

5.25" 2-Way In-Ceiling Speakers

RIFT 05



- Ultra-thin grill with acoustic fabric that blends in seamlessly with walls or ceiling
- 2-Way speakers with PP cone woofer for deep bass
- Crossover control for precise frequency balance
- 1.5 cm aesthetic frame for a clean appearance
- Excellent rear speaker solution
- Rigid and durable plastic housing

Specifications:

Power: 2-Way, 100W
Woofers: 5.25" | Tweeter: 1"
Impedance: 8Ω
Frequency Response: 75Hz–20kHz
±3dB
Sensitivity: 88dB ±3dB
Crossover: 12dB ±2dB

Dimensions (cm):

External Diameter: 20.2
Cutout Diameter: 16.6
Depth: 7.8

6.5" 2-Way In-Ceiling Speakers

RIFT 06



- Ultra-thin grill with acoustic fabric that blends in seamlessly with walls or ceiling
- 2-Way speakers with PP cone woofer for deep bass
- Crossover control for precise frequency balance
- 1.5 cm aesthetic frame for a clean appearance
- Excellent rear speaker solution
- Rigid and durable plastic housing

Specifications:

Power: 2-Way, 120W
Woofers: 6.5" | Tweeter: 1"
Impedance: 8Ω
Frequency Response: 60Hz–20kHz
±3dB
Sensitivity: 90dB ±3dB
Crossover: 12dB ±2dB

Dimensions (cm):

External Diameter: 23.8
Cutout Diameter: 20.2
Depth: 8.6

5.25" 2-Way In-Ceiling Speakers

RIFT RW052

Grill available in
black or white



- In-ceiling speakers with ultra-thin magnetic grill
- 2-Way speakers with Kevlar woofer and dome tweeter
- **Excellent rear speaker solution**
- 12dB crossover for precise frequency balance
- Perforated grill with acoustic fabric for a clean, discreet look and high-quality sound
- Available in two finishes: black or white

Specifications:

Power: 2-Way, 100W
Woofer: 5.25" | Tweeter: 1"
Impedance: 8Ω
Frequency Response: 35Hz–20kHz ±3dB
Sensitivity: 86dB ±3dB
Crossover: 12dB ±2dB | Magnet: 10Oz


Dimensions (cm):

External Diameter: 17.5
Cutout Diameter: 19.6
Depth: 7.7

6.5" 2-Way In-Ceiling Speakers

RIFT RW065

Grill available in
black or white

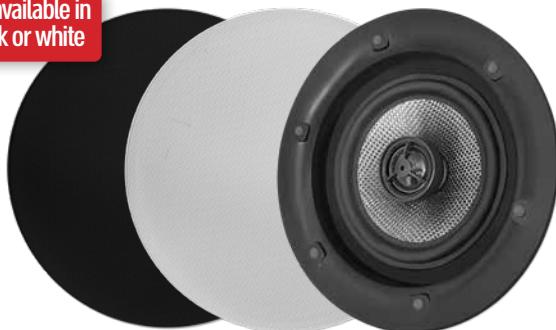

- In-ceiling speakers with ultra-thin magnetic grill
- 2-Way speakers with **Kevlar woofer** and dome tweeter
- **Excellent rear speaker solution**
- 12dB crossover for precise frequency balance
- Perforated grill with acoustic fabric for a clean, discreet look and high-quality sound
- Available in two finishes: black or white

Specifications:

Power: 2-Way, 120W
Woofer: 6.5" | Tweeter: 1"
Impedance: 8Ω
Frequency Response: 30Hz–20kHz ±3dB
Sensitivity: 86dB ±3dB
Crossover: 12dB ±2dB | Magnet: 10Oz


Dimensions (cm):

External Diameter: 20
Cutout Diameter: 22.5
Depth: 9.5

6.5" 2-Way In-Ceiling Speaker

RIFT 66

Grill available in
black or white

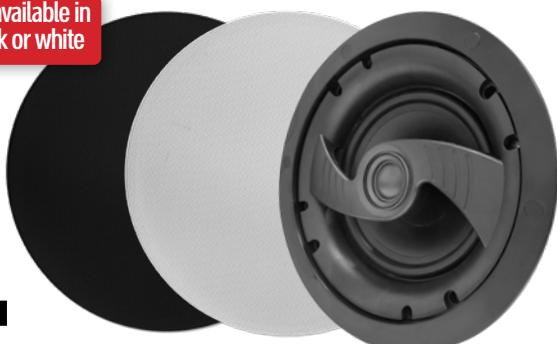

- In-ceiling speaker with ultra-thin magnetic grill
- 2-Way speaker with woofer and dome tweeter
- **Excellent rear speaker solution**
- 12dB crossover for precise frequency balance
- Perforated grill with acoustic fabric for a clean, discreet look and high-quality sound
- Available in two finishes: black or white

Specifications:

Power: 2-Way, 150W
Woofer: 6.5" | Tweeter: 1" Dome
Impedance: 8Ω
Frequency Response: 48Hz–20kHz ±3dB
Crossover: 12dB ±2dB
Sensitivity: 88dB ±3dB

Dimensions (cm):

Diameter: 24.4
Cutout Diameter: 20
Depth: 9.8

8" 2-Way In-Ceiling Speaker

RIFT 88

Grill available in
black or white



- In-ceiling speaker with ultra-thin magnetic grill
- 2-Way speaker with woofer and dome tweeter
- **Excellent rear speaker solution**
- 12dB crossover for precise frequency balance
- Perforated grill with acoustic fabric for a clean, discreet look and high-quality sound
- Available in two finishes: black or white

Specifications:

Power: 2-Way, 200W
Woofer: 8" Kevlar | Tweeter: 1" Dome
Impedance: 8Ω
Frequency Response: 30Hz–20kHz ±3dB
Crossover: 12dB ±2dB
Sensitivity: 88dB ±3dB

Dimensions (cm):

External Diameter: 27.2
Cutout Diameter: 24.1
Depth: 11

6.5" 2-Way In-Ceiling Speaker

SLIM-630

Grill available in
black or white

ULTRA SLIM
Depth: 5.4 cm



- High-quality, balanced audio that delivers a clear and rich listening experience without distortion.
- Ultra-thin magnetic grill
- Available in two finishes: black or white
- Quick installation with Quick-Fit clips
- Versatile installation options to suit different needs, including ceilings, walls, and non-standard locations.

Specifications:

Power: 120W
Frequency Response: 118Hz-20kHz
±3dB
Sensitivity: 91dB ±2dB
Impedance: 8Ω
Woofer: 6.5"

Dimensions (cm):

External Diameter: 24.8
Cutout Diameter: 21.3
Depth: 5.4

6.5" Ultra-Slim In-Ceiling Speaker

LUFT



Quick-Click
Installation
Patent

Ultra-Slim!
Only 5.8 cm
Depth

- 2-Way speaker
- Dome tweeter
- Precise frequency separation for crisp highs and rich bass ideal for home theater and professional stereo systems
- Quick installation with Quick-Fit clips
- Magnetic grill available in black and white
- Slim and elegant design: Ultra-Thin modern design that fits perfectly in any space.
- High-quality & durable: Long-lasting reinforced structure reduces vibrations and ensures clear sound.

Specifications:

Power: 2-Way 150W
Frequency Response: 68Hz-20kHz
Sensitivity: 89dB ±2dB
Impedance: 8Ω
Woofer: 6.5"
Tweeter: 0.5" PEI Dome
Grill Material: Coated steel

Dimensions (cm):

Cut-Out Diameter: 21.3 cm
Outer Frame Diameter: 24.8 cm
Installation Depth: 5.8 cm

6.5" BT In-Ceiling Speaker Pair

AIRSOUND-6

Grill available in
black or white



- In-ceiling speakers with ultra-low profile in-wall speakers that blend seamlessly with the wall
- High-performance Bluetooth 5.4 receiver for extended range and fast, stable data transfer (One active and one passive speaker)
- Magnetic steel grill in black or white finish
- Perfect solution for spaces without an amplifier/media cabinet

Specifications:

Bluetooth Version: 5.4
Power: 75W x 2
Woofer: 6.5" | Tweeter: 0.5" Mylar
Frequency Response: 70Hz-25kHz
±3dB
Sensitivity: 90dB ±3dB
Impedance: 8

Dimensions (cm):

Diameter: 21.5
Cutout Diameter: 19
Depth: 8

In-ceiling WiFi Speaker (1Master+1Slave)

RIFT W260

Features:

- Wi-Fi protocol: IEEE 802.11 a/b/g/n/ac 1x1 dual band WiFi 2.4 GHz and 5GHz
- Bluetooth 5.4 with EDR
- Supports WiFi/Bluetooth/U disk playback/AUX
- Supports APP interconnection control
- Supports 10/100Mbps Ethernet access/ HTTP/HTTPS protocol
- Supports Airplay/DLNA/Qplay streaming media protocol
- Supports AirPlay, Spotify, multi-room playback
- Supports Spotify, Tidal, Yandex Music, YouTube Music, Apple Music, Qobuz, Tuneln, etc.
- Supports common lossless audio format decoding, up to 192kHz/24-bit format
- Supports MP3/AAC/WMA/FLAC/AIFF/ALAC/APE/WAV decoders
- Supports 433 MHz wireless RF remote control

Specifications:

Audio Input: WiFi 2.4 G&5 G / Bluetooth 5.4 / USB / AUX
Work Voltage: DC 24V-4A
Output Power: 60W 4Ω
Frequency Response: 60Hz-20kHz
Harmonic Distortion: 0.05%
SNR: 90 dB
Sensitivity: 88 ±3dB
Product Dimensions: 29*29*13CM
Weight: 2.2 kg

4" Square In-Ceiling Speaker

RIFT MASQR

- 2-Way speaker
- Dome tweeter: Precise frequency separation for crisp highs and rich bass. Ideal for home theater and professional stereo systems
- Magnetic available in black and white
- Practical design: fits perfectly in any space without crowding the room
- Crossover for perfect balance between high and low frequencies offers a rich and natural sound experience.
- High-quality & durable: Long-lasting reinforced structure reduces vibrations, ensures clear sound.

Specifications:

Power: 2-Way 100W
Frequency Response: 80Hz–20kHz
Sensitivity: 88dB ±3dB
Impedance: 8Ω
Woofer: 4"
Tweeter: 0.5" PEI Dome



Dimensions (cm):

Cut-Out Dimensions: 108 x 108 mm
Outer Frame Dimensions:
127 x 127 mm
Installation Depth: 85 mm

4" In-Ceiling Speaker

RIFT MA4CRL

- 2-Way speaker
- Dome tweeter: Precise frequency separation for crisp highs and rich bass. Ideal for home theater and professional stereo systems
- Magnetic grill available in black and white.
- Practical design: Modern and elegant, fits perfectly in any space without crowding the room.
- Crossover control offers perfect balance between high and low frequencies for a rich and natural sound experience.
- High-quality & durable: Long-lasting reinforced structure reduces vibrations, ensures clear sound.

Specifications:

Power: 2-Way 100W
Frequency Response: 80Hz–20kHz
Sensitivity: 88dB ±3dB
Impedance: 8Ω
Woofer: 4"
Tweeter: 0.5" PEI Dome



PREMIUM LINE

RIFT MA5

5.25" In-Wall Speaker – 125W

- Elegant design provides a premium, luxurious look
- 2-Way speaker with 5.25" woofer and 0.75" tweeter
- Durable metal frame ensures stability while preventing unwanted vibrations/resonances
- Stainless steel aluminum grill resistant to varying environmental conditions suitable for use in bathrooms and kitchens
- Quick, easy, user-friendly installation
- 12dB crossover: precise sound balance.

Specifications:

Woofer: 5.25"
Tweeter: 0.75"
Power: 125W
Frequency Response: 70Hz–20kHz ±3dB
Impedance: 8Ω
Sensitivity: 89dB
Crossover: 12dB
Mounting Depth: 8 cm
Cutout Diameter: 18 cm
Overall Diameter (with grill): 20 cm
Grill Color: Black or White (included)



PREMIUM LINE

RIFT MA6

6.5" In-Wall Speaker – 150W

- Elegant design provides a premium, luxurious look
- 2-Way speaker with 6.5" woofer and 1" tweeter
- Durable metal frame ensures stability while preventing unwanted vibrations/resonances
- Stainless aluminum grill resistant to varying environmental conditions suitable for use in bathrooms and kitchens
- Quick, easy, user-friendly installation
- 12dB crossover: precise sound balance.

Specifications:

Woofer: 6.5"
Tweeter: 1"
Power: 150W
Frequency Response: 45Hz–20kHz ±3dB
Impedance: 8Ω
Sensitivity: 89dB ±3dB
Crossover: 12dB ±2dB
Mounting Depth: 10 cm
Cutout Diameter: 20 cm
Overall Diameter (with grill): 24.4 cm
Grill Color: Black or White (included)



PREMIUM LINE

RIFT MA8

8" In-Wall Speaker – 185W

- Elegant design provides a premium, luxurious look
- 2-Way speaker with an 8" woofer and 1" tweeter
- Durable metal frame ensures stability while preventing unwanted vibrations/resonances.
- Stainless aluminum grill resistant to varying environmental conditions suitable for use in bathrooms and kitchens
- Quick, easy, user-friendly installation
- 12dB crossover: precise sound balance.

Specifications:

Woofer: 8"
Tweeter: 1"
Power: 185W
Frequency Response: 40Hz–20kHz ±3dB
Impedance: 8Ω
Sensitivity: 89dB ±3dB
Crossover: 12dB ±2dB
Mounting Depth: 10.5 cm
Cutout Diameter: 24.3 cm
Overall Grill Diameter: 28 cm
Grill Color: Black and White (included)



In-Ceiling Speakers 100V Line

4" Hybrid Ceiling Speaker

RIFT 4LV8



- 4-wire transformer with adjustable power for 70V/100V systems
- Wide coverage. Designed to deliver uniform sound across large spaces
- Elegant design with flush-mount installation, magnetic grill, and slim frame
- Clear audio suitable for both music and speech
- Lightweight construction, easy installation with mounting clips
- Compatible with commercial audio and public address systems

Specifications:

Power: 10W / 5W / 2.5W – 100V

Output Power: 80W, 8Ω

Frequency Response: 80Hz–20kHz ±1dB

Sensitivity: 91 ±1dB

Woofer: 4"

Dimensions (cm):

Diameter: 15.0 cm

Depth: 6.2 cm

Cutout Diameter: 12.6 cm

5.25" Hybrid Ceiling Speaker

RIFT 5LV8



- 4-wire transformer with adjustable power for 70V/100V systems
- Wide coverage. Designed to deliver uniform sound across large spaces
- Elegant design with flush-mount installation, magnetic grill, and slim frame
- Clear audio suitable for both music and speech
- Lightweight construction, easy installation with mounting clips
- Compatible with commercial audio and public address systems

Specifications:

Power: 20W / 10W / 5W – 100V

Output Power: 100W, 8Ω

Frequency Response: 80Hz–20kHz ±1dB

Sensitivity: 90 ±1dB

Woofer: 5.25"

Dimensions (cm):

Diameter: 18.1 cm

Depth: 7.25 cm

Cutout Diameter: 16.1 cm

6.5" Hybrid Ceiling Speaker

RIFT 6LV8



- 4-wire transformer with adjustable power for 70V/100V systems
- Wide coverage. Designed to deliver uniform sound across large spaces
- Elegant design with flush-mount installation, magnetic grill, and slim frame
- Clear audio suitable for both music and speech
- Lightweight construction, easy installation with mounting clips
- Compatible with commercial audio and public address systems

Specifications:

Power Taps (100V): 30W / 15W / 7.5W

Power Output: 120W, 8Ω

Frequency Response: 70Hz–20kHz (±1dB)

Sensitivity: 92dB (±1dB)

Woofer: 6.5"

Dimensions (cm):

Diameter: 210 mm

Depth: 78 mm

Cutout Diameter: 186 mm

6.5" Hybrid Ceiling Speaker

RIFT 7LV8



- 4-wire transformer with adjustable power for 70V/100V systems
- Wide coverage. Designed to deliver uniform sound across large spaces
- Elegant design with flush-mount installation, magnetic grill, and slim frame
- Clear audio suitable for both music and speech
- Lightweight construction, easy installation with mounting clips
- Compatible with commercial audio and public address systems

Specifications:

Power Taps (100V): 30W / 15W / 7.5W

Power Output: 120W, 8Ω

Frequency Response: 70Hz–20kHz (±1dB)

Sensitivity: 92dB (±1dB)

Woofer: 6.5"

Dimensions (cm):

Diameter: 210 mm

Depth: 148 mm

Cutout Diameter: 186 mm

8" Hybrid Ceiling Speaker

RIFT 8LV8



- 4-wire transformer with adjustable power for 70V/100V systems
- Wide coverage. Designed to deliver uniform sound across large spaces
- Elegant design with flush-mount installation, magnetic grill, and slim frame
- Clear audio quality suitable for both music and speech
- Lightweight construction, easy installation with mounting clips
- Compatible with commercial audio and public address systems

Specifications:

Power Taps (100V): 40W / 20W / 10W

Power Output: 150W, 8Ω

Frequency Response: 70Hz–20kHz (±1dB)

Sensitivity: 92dB (±1dB)

Woofer: 8"

Dimensions (cm):

Diameter: 245 mm

Depth: 84 mm

Cutout Diameter: 218 mm

5" In-Wall Line Transformer Speaker – with Triple Terminal

VX-515



**2-Way
Musical**

Specifications:

Power Handling: 3W / 6W – 100V
Power Output: 20W, 8Ω
Woofers: 5"
Frequency Response: 90Hz–16kHz ±1dB
Sensitivity: 89dB ±1dB

Dimensions (Diameter):

Overall: 17.3 cm
Cutout Size: 15 cm
Depth: 4.1 cm

6.5" In-Wall Line Transformer Speaker – with Triple Terminal

RIFT 614



**2-Way
Musical**

Specifications:

Power Handling: 2.5W / 5W / 10W – 100V
Power Output: 24W, 8Ω
Woofers: 6.5"
Frequency Response: 100Hz – 16kHz ±1dB
Sensitivity: 92dB ±1dB

Dimensions (Diameter):

Overall: 19 cm
Cutout Size: 18.5 cm
Depth: 6.6 cm

6" In-Wall Line Transformer Speaker – with Triple Terminal

VX-615



**2-Way
Musical**

Specifications:

Power Handling: 2.5W / 5W / 10W – 100V
Power Output: 10W, 8Ω
Woofers: 6"
Frequency Response: 80Hz – 20kHz ±1dB
Sensitivity: 91dB ±1dB

Dimensions (Diameter):

Overall: 18.6 cm
Cutout Size: 16.3 cm

8" In-Wall Line Transformer Speaker – with Triple Terminal

VX-818



**2-Way
Musical**

Specifications:

Power Handling: 7.5W / 15W – 100V
Power Output: 40W, 8Ω
Woofers: 8"
Frequency Response: 100Hz – 15kHz ±1dB
Sensitivity: 93dB ±1dB

Dimensions (Diameter):

Overall: 22.4 cm
Cutout Size: 20 cm
Depth: 7.2 cm

8" In-Wall Line Transformer

VTX-840

Speaker

**2-Way
Musical**

Power Handling: 10W / 20W / 40W – 100V
Power Output: 80W, 8Ω
Woofers: 8"
Tweeter: 1"
Frequency Response: 50Hz – 20kHz ±1dB
Sensitivity: 90dB ±1dB

Dimensions (Diameter):

Overall: 22.6 cm
Cutout Size: 20 cm
Depth: 7.8 cm

6.5" In-Wall Line Transformer

VTX-630

Speaker

**2-Way
Musical**

Power Handling: 10W / 20W / 40W – 100V
Power Output: 80W, 8Ω
Woofers: 8"
Tweeter: 1"
Frequency Response: 50Hz – 20kHz ±1dB
Sensitivity: 90dB ±1dB

Dimensions (Diameter):

Overall: 22.6 cm
Cutout Size: 20 cm
Depth: 7.8 cm

In-Wall Speakers

Pair of 6.5" In-Wall Speakers with Flat Magnetic Grill

RIFT 89



Features:

- Rectangular in-wall speakers
- Slim magnetic grill that blends in seamlessly with the wall and ceiling
- Paintable/customizable grill
- 12dB crossover for more accurate frequency balance
- Easy and convenient installation

Specifications:

Power: 2-Way 150W
Woofers: 6.5" polypropylene
Titanium Tweeter: 0.75"
Impedance: 8Ω
Frequency Response: 48Hz–20kHz
Sensitivity: 91dB ±3dB
Crossover: 12dB ±2dB

Dimensions (cm):

External: H 30.7 x D 8.2 x W 20.7
Cutout: H 27 x D 7.8 x W 17

In-Wall LCR Center Speaker with Flat Magnetic Grill

RIFT 52



Features:

- 2-Way speaker
- Slim grill
- Rich sound
- 12dB crossover
- Directional adjustment of high frequencies
- Vibration and noise damping system
- Easy and convenient installation

Specifications:

Power: 165W
Woofers: 2x5.25"
Titanium Dome Tweeter: 0.75"
Impedance: 8Ω
Frequency Response: 49Hz–20kHz
Sensitivity: 88dB ±3dB
Crossover: 12dB ±2dB

Dimensions (cm):

External: H 18.7 x D 7.7 x W 37.3
Cutout: H 15.2 x D 7.3 x W 35.7

8" In-wall speaker (pair)

RIFT F8



Features:

- Ultra-thin magnetic grills
- 2-Way Fiberglass woofer
- Dome tweeter
- High-quality + balanced sound solution
- 12dB crossover offers accurate frequency balancing
- Fiberglass cone for a clean, aesthetic appearance
- Black panel
- White magnetic mesh cover

Specifications:

Power Output: 2-Way 135W
Frequency: 60Hz-20 KHz
Sensitivity: 90dB±3dB
Impedance: 8Ω
Woofers: 8"
Tweeter: 1" Dome
Crossover network: 12dB ±2dB
Cutout dimension: 327x232mm (12.9"x9.13")
Gross dimension: 360x265mm (14.17"x10.43")
Depth dimension: 110mm (4.33")

8" In-wall dual woofer speaker (pair)

RIFT F8C



Features:

- Ultra-thin magnetic grills
- 2-Way Fiberglass woofer
- Dome tweeter
- High-quality + balanced sound solution
- 12dB crossover offers accurate frequency balancing
- Fiberglass cone for clean, aesthetic appearance
- Black panel
- White magnetic mesh cover

Specifications:

Power Output: 3-Way 150W
Frequency: 65Hz-20KHz
Sensitivity: 90dB±3dB
Impedance: 8Ω
Woofers: 8" x2
Tweeter: 1" Dome
Crossover network: 12dB ±2dB
Cutout dimension: 535x232mm (21"x9.13")
Gross dimension: 566x264mm (22.3"x10.4")
Depth dimension: 110mm (4.33")



Wild
Unmuted



Bookshelf Speakers

Pair of Wireless Powered Speakers-2-Way, 5.25"

STUDIO-500

TWS – Connect 4 Wireless Speakers to Same Source

TWS



- 2x50W RMS power
- Active speaker + passive speaker
- Built-in amplifier, no receiver required
- Bluetooth connectivity
- Bass, treble, and master volume controls
- Subwoofer output for active subwoofer
- Audio output allows daisy-chaining additional speakers
- Dynamic and rich sound dispersion
- RCA input • USB MP3 playback
- Acoustic frame for enhanced vocal's performance
- 2 Lightweight and convenient mounting brackets
- Easy and quick installation
- Available in black or white finish

Specifications:

Power: 50W + 50W (RMS)
 Woofer: 5.25" 2-Way
 Tweeter: 0.75"
 Impedance: 8Ω
 Frequency Response: 55Hz–20kHz
 (±3dB)
 Sensitivity: 88dB (±3dB)
 Voltage: AC 100–240V, 50/60Hz,
 30W

Dimensions (cm):

Height: 25.3
 Depth: 18.5
 Width: 16.7

Pair of Wireless Powered Speakers-2-Way, 6.5"

STUDIO-600

TWS – Connect 4 Wireless Speakers to Same Source

TWS



- 2x75W RMS power
- Active speaker + passive speaker
- Built-in amplifier, no receiver required
- Bluetooth connectivity
- Bass, treble, and master volume controls
- Subwoofer output for active subwoofer
- Audio output allows daisy-chaining additional speakers
- Dynamic and rich sound dispersion
- RCA input • USB MP3 playback
- Acoustic frame for enhanced vocal's performance
- 2 Lightweight and convenient mounting brackets
- Easy and quick installation
- Available in black or white finish

Specifications:

Power: 75W + 75W (RMS)
 Woofer: 6.5" 2-Way
 Tweeter: 0.75"
 Impedance: 8Ω
 Frequency Response: 55Hz–20kHz
 (±3dB)
 Sensitivity: 88dB (±3dB)
 Voltage: AC 100–240V, 50/60Hz,
 40W

Dimensions (cm):

Height: 30
 Depth: 19.4
 Width: 21.6

Pair of Powered Speakers-2-Way, 4"

CLASS-100



- 2-Way, 4" Woofer
- 2x25W RMS power
- Active speaker + passive speaker
- Dynamic and rich sound dispersion
- Built-in amplifier, no receiver required
- RCA and USB memory card inputs
- Bass, treble, and main master volume controls
- Acoustic frame for enhanced vocal's performance
- 2 Lightweight and convenient mounting brackets for easy installation

Specifications:

Power: 2x25W
Woofers: 4"
Tweeter: 1"
Impedance: 4-8Ω
Frequency Response: 65Hz-20kHz
(±3dB)
Sensitivity: 88dB (±3dB)
Voltage: AC 230V, 50/60Hz, 30W

Dimensions (cm):

Height: 22
Depth: 18
Width: 14.5

Pair of Powered Speakers for Classrooms and Lecture Halls

CRL-250



- 2-Way, 5.25" Woofer
- 150W Power
- Active speaker + passive speaker
- Dynamic and rich sound dispersion
- Wired microphone input with volume control
- Audio output for daisy-chaining additional speaker sets
- Built-in amplifier – no receiver required
- RCA input
- Bass, treble, and main volume controls
- Acoustic frame for enhanced vocal performance
- Easy and quick installation
- Includes 2 mounting brackets for convenient installation

Specifications:

Power: 75W + 75W (RMS)
Woofers: 5.25"
Tweeter: 0.75"
Impedance: 8Ω
Frequency Response: 60Hz-18kHz
(±3dB)
Sensitivity: 86dB (±3dB)
Voltage: AC 110-240V / 50Hz

Dimensions (cm):

Height: 24.4
Depth: 16.3
Width: 18.5

5" Half-Moon Line Transformer Wall Speaker **VW-245**



Features:

- Specifically designed for commercial and fire detection audio systems
- Compatible with 100V line transformer with 3 taps
- Easy installation, secure wall mount included
- ABS frame with metal grill
- Available in black or white

Dimensions:

Width: 20 cm Height: 22.8 cm Depth: 8.5 cm

Specifications:

Woofer: 5"
Tweeter: 0.5" Neodymium
Power Handling: 10W / 5W / 2.5W – 100W
Power Output (8Ω): 20W
Frequency Response: 80Hz – 20kHz
±1dB
Sensitivity: 91dB ±1dB

6" Half-Moon Line Transformer Wall Speaker **VW-246**



Features:

- Specifically designed for commercial and fire detection audio systems
- Compatible with 100V line transformer with 3 taps
- Easy installation, secure wall mount included
- ABS frame with metal grill
- Available in black or white


Dimensions:

Width: 24 cm Height: 34.5 cm Depth: 10 cm

Specifications:

Woofer: 6"
Tweeter: 0.5" Neodymium
Power Handling: 20W / 10W / 5W – 100W
Power Output (8Ω): 40W
Frequency Response: 80Hz – 20kHz
±1dB
Sensitivity: 91dB ±1dB

On-Wall Speakers

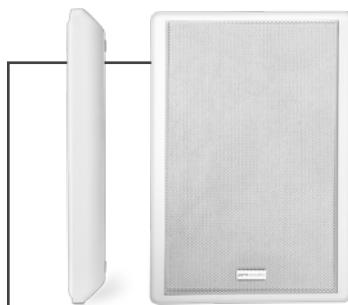

Slim and Flat Speaker

**SUPER THIN!
3.7 CM**

- 2-Way speaker system
- Ultra-thin frame: 3.7 cm (1.5")
- Rust-proof flat aluminum grill
- designed for a sleek on-wall finish
- Easy to install and use

Dimensions (cm):

(H) 27.2, (W) 18.4, (D) 3.7

Specifications:

Power: 120W, 2-Way
Woofer: 5.25" Polypropylene
Tweeter: Mylar Dome
Impedance: 8Ω
Frequency Response: 65Hz–20kHz ±3dB
Sensitivity: 90dB ±3dB

FRS-375

Ultra-Compact Satellite Speakers (pair)



- Amazing sound: 120W power and 8Ω per speaker
- Mounting brackets that allow for full movement and optimal positioning included
- Cloth-covered grill smooth, warm look
- Available in black or white finish

Specifications

Power: 150W
Woofer: 2.5"
Impedance: 8Ω
Frequency Response: 150Hz–22kHz ±3dB

Dimensions (cm):

(W) 9 x (H) 9 x (D) 10

HT-800

10" Professional 2-Way 300W PA Speaker



- Powerful 10" PA wall-mount speaker, ideal for indoor installations
- Rigid, high-grade enclosure ensures durability and long-lasting premium audio performance
- 2-Way system with Neodymium tweeter for rich and detailed sound
- Maximum power of 300W RMS delivers an impressive presence in any space
- 10" woofer provides a deep, warm, and powerful bass; perfect for live music, speech, and dynamic sound reinforcement
- 8Ω impedance, compatible with standard amplifiers
- Allows daisy-chaining of speakers
- High sensitivity of 95dB SPL for optimal efficiency and easy drive capability
- 60Hz–18kHz frequency response, suitable for both speech and music

ATLAS PRO 10

Specifications:

Woofer: 10"
Tweeter: Neodymium
Impedance: 8Ω
Maximum Power: 300W
RMS
Frequency Response:
60Hz–18kHz (±3dB)
Sensitivity: 95dB SPL
(1W/1m)

12" Professional 2-Way 400W PA Speaker



- Powerful 12" PA wall-mount speaker, ideal for indoor installations
- Rigid, high-grade enclosure ensures durability and long lasting premium audio performance
- 2-Way system with Neodymium tweeter for rich and detailed sound
- Maximum power of 400W RMS delivers an impressive presence in any space
- 12" woofer provides a deep, warm, and powerful bass; perfect for live music, speech, and dynamic sound reinforcement
- 8Ω impedance, compatible with standard amplifiers
- Allows daisy-chaining of speakers
- High sensitivity of 97dB SPL for optimal efficiency and easy drive capability
- 50Hz–18kHz frequency response, suitable for both speech and music

ATLAS PRO 12

Specifications:

Woofer: 12"
Tweeter: Neodymium
Impedance: 8Ω
Maximum Power: 400W
RMS
Frequency Response:
50Hz–18kHz (±3dB)
Sensitivity: 97dB SPL
(1W/1m)

15" Professional 2-Way 500W PA Speaker



- Powerful 15" PA wall-mount speaker, ideal for indoor installations
- Rigid, high-grade enclosure ensures durability and long lasting premium audio performance
- 2-Way system with Neodymium tweeter for rich and detailed sound
- Maximum power of 500W RMS delivers an impressive presence in any space
- 15" woofer provides a deep, warm, and powerful bass; perfect for live music, speech, and dynamic sound reinforcement
- 8Ω impedance, compatible with standard amplifiers
- Allows daisy-chaining of speakers
- High sensitivity of 101dB SPL for optimal efficiency and easy drive capability
- 50Hz–18kHz frequency response, suitable for both speech and music

ATLAS PRO 15

Specifications:

Woofer: 15"
Tweeter: Neodymium
Impedance: 8Ω
Maximum Power: 500W
RMS
Frequency Response:
50Hz–18kHz (±3dB)
Sensitivity: 101dB SPL
(1W/1m)

Pair of Indoor 2-Way Hanging/Shelf Speakers

PREMIUM LINE **C-106**



- Pair of powerful 2-Way speakers
- Closed wooden cabinet with acoustic fabric for deep, high-quality, and immersive sound in large spaces
- Built-in crossover for accurate sound and precise frequency distribution between lows and highs
- SPEAKON connectors for quick and easy installation
- Neodymium tweeter for rich and detailed sound
- Pair of multi-angle brackets included; allow mounting in various positions: ceiling, wall, vertical, horizontal, tilted 0–30°, attachable on back, sides, top, or bottom of the speaker
- Easy installation with SPEAKON connector and mounting bracket
- Available in black or white

Specifications:

Power: 170W
Woofers: 6" Magnetic 2-Way
Tweeter: 3" Voice Coil
Impedance: 8Ω
Frequency Response: 60Hz–20kHz ±3dB

Dimensions (cm):

(H) 34.5, (W) 21.5, (D) 19.5

8" 2-Way Passive Speaker

PREMIUM LINE **C-108**



- Pair of powerful 2-Way speakers
- Closed wooden cabinet with acoustic fabric for deep, high-quality, and immersive sound in large spaces
- Built-in crossover for accurate sound and precise frequency distribution between lows and highs
- SPEAKON connectors for quick and easy installation
- Neodymium tweeter for rich and detailed sound
- Pair of multi-angle brackets included; allow mounting in various positions: ceiling, wall, vertical, horizontal, tilted 0–30°, attachable on back, sides, top, or bottom of the speaker
- Easy installation with SPEAKON connector and mounting bracket
- Available in black or white

Specifications:

Power: 220W
Woofers: 8" Magnetic 2-Way
Tweeter: 1" Voice Coil + Horn
Impedance: 8Ω
Frequency Response: 50Hz–20kHz (±3dB)

Dimensions (cm):

(H) 44.4, (W) 24.5, (D) 23.5

10" 2-Way Passive Speaker

PREMIUM LINE **C-110**



- Pair of powerful 2-Way speakers
- Closed wooden cabinet with acoustic fabric for deep, high-quality, and immersive sound in large spaces
- Built-in crossover for accurate sound and precise frequency distribution between lows and highs
- SPEAKON connectors for quick and easy installation
- Neodymium tweeter for rich and detailed sound
- Pair of multi-angle brackets included; allow mounting in various positions: ceiling, wall, vertical, horizontal, tilted 0–30°, attachable on back, sides, top, or bottom of the speaker
- Easy installation with SPEAKON connector and mounting bracket
- Available in black or white

Specifications:

Power: 250W
Woofers: 10" Magnetic 2-Way
Tweeter: 1" Voice Coil + Horn
Impedance: 8Ω
Frequency Response: 40Hz–20kHz (±3dB)

Dimensions (cm):

(H) 49, (W) 30, (D) 27.8

4.5" Water-Resistant Speaker: Indoor/Outdoor

BLYSS OT524

IP-66
WATERPROOF



- High-quality speaker designed to deliver dynamic and open audio
- Stainless aluminum grill that meets the highest durability standards.
- IP-66 rated; designed to withstand all weather conditions including rain systems, water jets, etc.
- Copper connectors with corrosion protection via sealant
- Includes bracket for horizontal/vertical mounting
- Perfect for installation at home, in yards, gardens, studios, restaurants, event halls, cafes, educational institutions, PA systems, and parks.
- Finish: White

Specifications:

4.5" 2-Way woofer
1" tweeter
Power: 80W @ 8Ω
Power: up to 30W @ 100V
Frequency response: 45Hz–20kHz ±3dB

Sensitivity: 86dB
Water and dust resistant IP66 with stainless steel grill
Dimensions: 15×15×23 cm
Color: White

Powerful 6.5" 150W Speakers (pair)

PREMIUM LINE

M-306



Includes
Hanging
Bracket



- Pair of powerful 2-Way speakers
- Enclosed wooden cabinet with acoustic fabric for deep, high-quality, immersive sound in large spaces
- Crossover for precise sound and separation of lows and highs
- SPEAKON connectors for quick and easy installation
- Neodymium tweeter makes for sound with clear high frequencies
- Pair of multi-angle brackets included; allow mounting in various positions: ceiling, wall, vertical, horizontal, tilted 0–30°, with attachment on back, sides, top, or bottom of the speaker
- Easy installation with SPEAKON connector and bracket
- Available in black or white

Specifications:

Power: 150W
Woofer: 6.5" Magnetic 2-Way
Tweeter: 1" Neodymium
Impedance: 8Ω
Frequency Response: 60Hz–20kHz ±3dB

Dimensions (cm):


(H) 31.8, (W) 21, (D) 18.2

PREMIUM LINE

M-308



Includes
Hanging
Bracket

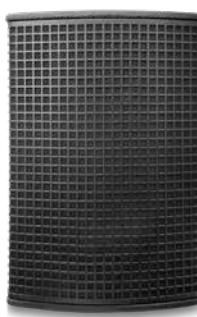

- Pair of powerful 2-Way speakers
- Enclosed wooden cabinet with acoustic fabric for deep, high-quality, immersive sound in large spaces
- Crossover for precise sound and separation of lows and highs
- SPEAKON connectors for quick and easy installation
- Neodymium tweeter makes for sound with clear high frequencies
- Pair of multi-angle brackets included; allow mounting in various positions: ceiling, wall, vertical, horizontal, tilted 0–30°, with attachment on back, sides, top, or bottom of the speaker
- Easy installation with SPEAKON connector and bracket
- Available in black or white

Specifications:

Power: 200W
Woofer: 8" magnetic 2-Way
Neodymium Tweeter: 1"
Impedance: 8Ω
Frequency Response: 50Hz–20kHz ±3dB

Dimensions (cm):


(H) 35.9, (W) 24, (D) 20.8

PREMIUM LINE

M-310



Includes
Hanging
Bracket

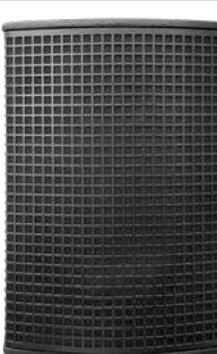

- Pair of powerful 2-Way speakers
- Enclosed wooden cabinet with acoustic fabric for deep, high-quality, immersive sound in large spaces
- Crossover for precise sound and separation of lows and highs
- SPEAKON connectors for quick and easy installation
- Neodymium tweeter makes for sound with clear high frequencies
- Pair of multi-angle brackets included; allow mounting in various positions: ceiling, wall, vertical, horizontal, tilted 0–30°, with attachment on back, sides, top, or bottom of the speaker
- Easy installation with SPEAKON connector and bracket
- Available in black or white

Specifications:

Power: 300W
Woofer: 10" Magnetic 2-Way
Neodymium Tweeter: 1"
Impedance: 8Ω
Frequency Response: 40Hz–20kHz ±3dB

Dimensions (cm):

(H) 49, (W) 30, (D) 27.7



6.5" Water-Resistant Speaker: Indoor/Outdoor

BLYSS OT526



IP-66
WATERPROOF



- High-quality speaker designed to deliver dynamic and open audio
- Stainless aluminum grill that meets the highest durability standards.
- IP-66 rated; designed to withstand all weather conditions including rain systems, water jets, etc.
- Copper connectors with corrosion protection via sealant
- Includes bracket for horizontal/vertical mounting
- Perfect for installation at home, in yards, gardens, studios, restaurants, event halls, cafes, educational institutions, PA systems, and parks.

Specifications:

Woofer: 2-Way 6.5"
Tweeter: 1"
Power: 120W @ 8Ω
Power: up to 40W @ 100V
Frequency Response: 35Hz–20kHz ±3dB
Sensitivity: 90dB
Water and dust resistant IP66 with stainless aluminum grill
Dimensions: 20x19x29 cm

8" Water-Resistant Speaker: Indoor/Outdoor

BLYSS OT528



IP-66
WATERPROOF



- High-quality speaker designed to deliver dynamic and open audio
- Stainless aluminum grill that meets the highest durability standards.
- IP-66 rated; designed to withstand all weather conditions including rain systems, water jets, etc.
- Copper connectors with corrosion protection via sealant
- Includes bracket for horizontal/vertical mounting
- Perfect for installation at home, in yards, gardens, studios, restaurants, event halls, cafes, educational institutions, PA systems, and parks.

Specifications:

Woofer: 8"
Tweeter: 1"
Power: 150W at 8Ω
Power at 100V: up to 50W
Frequency response: 25Hz–20kHz ±3dB
Sensitivity: 91dB
Water- and dust-resistant IP66 with stainless aluminum grill
Dimensions: 25x24x36 cm

Pendant Speakers

6.5" Ceiling Hanging Speaker with Line Transformer and Water-Resistant Design

BLYSS G462

IP-66
WATERPROOF



- Multi-purpose speaker with full mounting kit: ceiling, wall, floor, and ground-spike installation compatible
- Acoustic resonance enclosure for uniform sound dispersion and 120° coverage
- Stainless aluminum grill designed to meet the highest durability standards
- IP66-rated, designed to withstand all weather conditions (spray systems, water jets, etc.)
- Perfect for high-ceilinged spaces and projects requiring premium aesthetics
- "Low-ceiling effect" compensates for sound lost in high ceilings, producing natural and accurate audio
- Perfect for installation in restaurants, bars, shops, meeting rooms, hospitality spaces, and halls
- For optimal sound and full frequency range, it is recommended to pair MARS-65 with a subwoofer

Specifications:

Tweeter: 1"
Woofers: 6.5"
Frequency Response: 35Hz-20kHz ±3dB
Power: 120W RMS @ 8Ω
Power @ 100V: up to 40W
Sensitivity: 90dB
Water and dust resistant: IP66, with stainless aluminum grill
Dimensions (HxWxD): 30x23x23 cm
Finish: White / Black

8" Ceiling Hanging Speaker with Line Transformer and Water-Resistant Design

BLYSS G482

IP-66
WATERPROOF



- Multi-purpose speaker with full mounting kit: ceiling, wall, floor, and ground-spike installation compatible.
- Acoustic resonance enclosure for uniform sound dispersion and 120° coverage.
- Stainless aluminum grill designed to meet the highest durability standards.
- IP66-rated, designed to withstand all weather conditions (spray systems, water jets, etc.)
- Perfect for high-ceilinged spaces and projects requiring premium aesthetics.
- "Low-ceiling effect" compensates for sound lost in high ceilings, producing natural and accurate audio.
- Perfect for installation in restaurants, bars, shops, meeting rooms, hospitality spaces, and halls.
- For optimal sound and full frequency range, it is recommended to pair MARS-85 with a subwoofer.

Specifications:

Tweeter: 1"
Woofers: 8"
Frequency Response: 25Hz-20kHz ±3dB
Power: 150W RMS @ 8Ω
Power at 100V: up to 50W
Sensitivity: 91dB
Water and dust resistant (IP66) with stainless
aluminum grill
Dimensions (H x W x D): 34 x 27 x 27 cm
Finish: Black

8" Hybrid Hanging Ceiling Subwoofer: Indoor/Outdoor

MARS-SUB-8

IP-66
WATERPROOF



- 360° Omnidirectional sound with uniform dispersion and acoustic resonance enclosure
- IP66-rated, designed to withstand all weather conditions (spray systems, water jets, etc.)
- Perfect for high-ceilinged spaces and projects requiring premium aesthetics.
- Multi-purpose speaker with full mounting kit: ceiling, wall, floor, and ground-spike installation compatible.
- Stainless aluminum grill designed to meet the highest durability standards.
- "Low-ceiling effect" compensates for sound lost in high ceilings, producing natural and accurate audio.
- Built-in line transformer allows daisy-chaining of multiple units

Specifications:

Power: 150W
Impedance: 4Ω
100V Power Taps: 50W, 25W, 12.5W, 6.25W
Frequency Response: 75Hz-700Hz ±3dB
Sensitivity: 86dB ±3dB

Woofers: 8" graphite cone with rubber
surround

Connections: Spring-loaded terminals

Enclosure Material: Polypropylene

Grill Material: Aluminum

Includes: 3-meter adjustable steel cable and
safety rope

Dimensions: 37.3 x 25.3 cm

IP-66
WATERPROOF

- Acoustic resonance enclosure ensures even sound dispersion throughout the listening area with 120° of coverage.
- Passive bass radiator OBE technology complements the main driver and enhances low frequencies for a deep, resonant bass.
- Stainless aluminum grill that meets the highest durability standards.
- IP-66 rated; designed to withstand all weather conditions including rain systems, water jets, etc.
- Perfect for high-ceilinged spaces and projects requiring premium aesthetics.
- "Low-ceiling effect" compensates for sound lost in high ceilings, producing natural and accurate audio.
- Perfect for installation in restaurants, bars, shops, meeting rooms, hospitality spaces, and halls.
- For optimal sound and full frequency range, it is recommended to pair G-483 with a subwoofer.

Specifications:

Tweeter: 1.1"

Woofer: 8"

Frequency Response: 37Hz–20kHz ±3dB

Power: 150W @ 8Ω

Power (100V): up to 50W

Sensitivity: 86dB

Ingress Protection: IP66, with stainless aluminum grill

Dimensions (H x W x D): 37 x 25 x 25 cm

Finish: Brown





On-Wall Speakers 100V Line

4" Public Address Speaker – Indoor/Outdoor

BLYSS 41



Specifications:

Woofer: 4"
Power Handling: 2.5W / 5W / 10W (100V)
Power Output: 20W (8Ω)
Impedance: 8Ω
Frequency Response: 90Hz–18kHz ±1dB
Sensitivity: 91dB ±1dB
Finish: Black / White

IP-65

2-Way
Musical

ALUMINUM
GRILL

Dimensions (cm): H: 18 x W: 13 x D: 10

5.25" Public Address Speaker – Indoor/Outdoor

BLYSS 51



Specifications:

Woofer: 5.25"
Power Handling: 3.75W / 7.5W / 15W (100V)
Power Output: 30W (8Ω)
Impedance: 8Ω
Frequency Response: 90Hz–18kHz ±1dB
Sensitivity: 91dB ±1dB
Finish: Black / White

IP-65

2-Way
Musical

ALUMINUM
GRILL

Dimensions (cm): H: 23 x W: 16 x D: 13.5

6.5" Public Address Speaker – Indoor/Outdoor

BLYSS 61



Specifications:

Woofer: 6.5"
Power Handling: 7.5W / 15W / 30W (100V)
Power Output: 60W (8Ω)
Impedance: 8Ω
Frequency Response: 90Hz–18kHz ±1dB
Sensitivity: 91dB ±1dB
Finish: Black / White

IP-65

2-Way
Musical

ALUMINUM
GRILL

Dimensions (cm): H: 28 x W: 20 x D: 18



PA Speakers

Professional Horn **VHP-20**

Speaker – 20W



IP-66

Power Output: **10W / 20W** (100V)

Impedance: 8Ω

Frequency Response: 250Hz–8kHz

Sensitivity: 110dB

Dimensions (cm): 18.5 × 22 × 24

Professional Horn **VHA-110**

Speaker – 110W



IP-66

Power Output: 110W

Impedance: 16Ω

Sensitivity: 108dB

Frequency Response: 400Hz–5kHz

Power Taps (100V: 27.5W / 55W / 110W

Power Taps (70V: 13.75W / 27.5W / 55W /

110W

Transformer Settings: 16Ω / OFF

Weatherproof Rating: IP66

Dimensions (cm): Diameter 50 × Depth 48.2

Color: Gray

Professional Horn **VHA-85**

Speaker – 85W



IP-66

Power Output: 85W

Impedance: 16Ω

Sensitivity: 105dB

Frequency Response: 400Hz–5kHz

Power Taps (100V: 21.25W / 42.5W / 85W

Power Taps (70V: 11W / 21.25W / 42.5W /

85W

Transformer Settings: 16Ω / OFF


Weatherproof Rating: IP66

Dimensions (cm): Diameter 40.05 × Depth 42

Color: Gray

Professional Horn **VHP-30**

Speaker – 30W

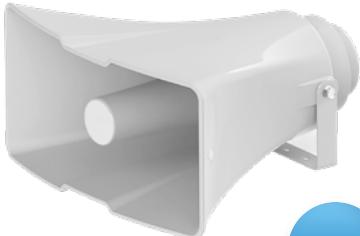

IP-66

Power Output: **15W / 30W** (100V)

Impedance: 8Ω

Frequency Response: 300Hz–8kHz

Sensitivity: 110dB

Dimensions (cm): 20.5 × 28.5 × 28

Professional Horn **VHP-40**

Speaker – 40W



IP-66

Power Output: 40W

Impedance: 8Ω

Sensitivity: 103dB

Frequency Response: 400Hz–5kHz

Power Taps (100V: 10W / 20W / 40W

Transformer Settings: 8Ω / OFF

Dimensions (cm): W: 31.5 × H: 20.7 × D: 36.8

Color: Gray

Professional Horn **VHA-65**

Speaker – 65W



IP-66

Power Output: 65W

Impedance: 16Ω

Sensitivity: 103dB

Frequency Response: 400Hz–5kHz

Power Taps (100V: 16.25W / 32.5W / 65W

Power Taps (70V: 8.15W / 16.25W / 32.5W /

65W

Transformer Settings: 16Ω / OFF


Weatherproof Rating: IP66

Dimensions (cm): Diameter 32.3 × Depth 35.7

Color: Gray

2-Way Musical Horn Speaker – 100W

VHM-100

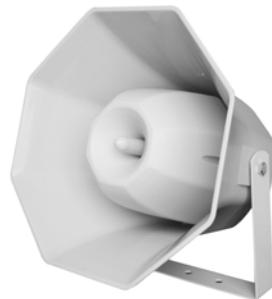

- Operates at 8Ω or 100V
- 2-Way horn
- 6.5" Woofer
- 1" Dome tweeter
- Ideal for playback in large-scale installations (institutions, halls, factories, parking lots, beaches, etc.)
- Can be mounted on walls, ceilings, or floors
- Powerful long-range sound dispersion
- Weatherproof rating: IP66
- ABS finish suitable for all weather conditions

Specifications:

Power Output: 100W (100V)
Impedance: 8Ω
Frequency Response: 300Hz–8kHz
Sensitivity: 110dB
Finish: White

Dimensions (cm): H: 36.5 x W: 36 x D: 38.5

Musical 4-Driver Speaker – 400W

VHM-400



- Operates at 8Ω or 100V
- 2-Way horn
- 6.5" Woofer
- 1" Titanium dome tweeter
- Ideal for playback in large-scale installations (institutions, halls, factories, parking lots, beaches, etc.)
- Can be mounted on walls, ceilings, or floors
- Powerful long-range sound dispersion
- Weatherproof rating: IP66
- ABS finish suitable for all weather conditions

Specifications:

Power Output: 400W (100V)
Impedance: 8Ω
Frequency Response: 400Hz–4kHz
Sensitivity: 113dB
Drivers: 4 x HD150N
Finish: White

Dimensions (cm):
Diameter 48.5 x Depth 52.5

20W Line Transformer

VCL-1620

Speaker – PROJECTOR

Power Output: 20W – 100V
Woofer 6.5"
Impedance 8Ω
Frequency Response 110Hz – 15kHz
Sensitivity 110dB

Dimensions:

Diameter 16.5 cm
17 x 24.5 cm



10W Line Transformer

VCL-1510


Speaker – PROJECTOR

Power Output: 10W – 100V
Woofer 5.25"
Impedance 8Ω
Frequency Response 130Hz – 15kHz
Sensitivity 110dB

Dimensions:

Diameter 13.1 cm
13.8 x 20.5 cm

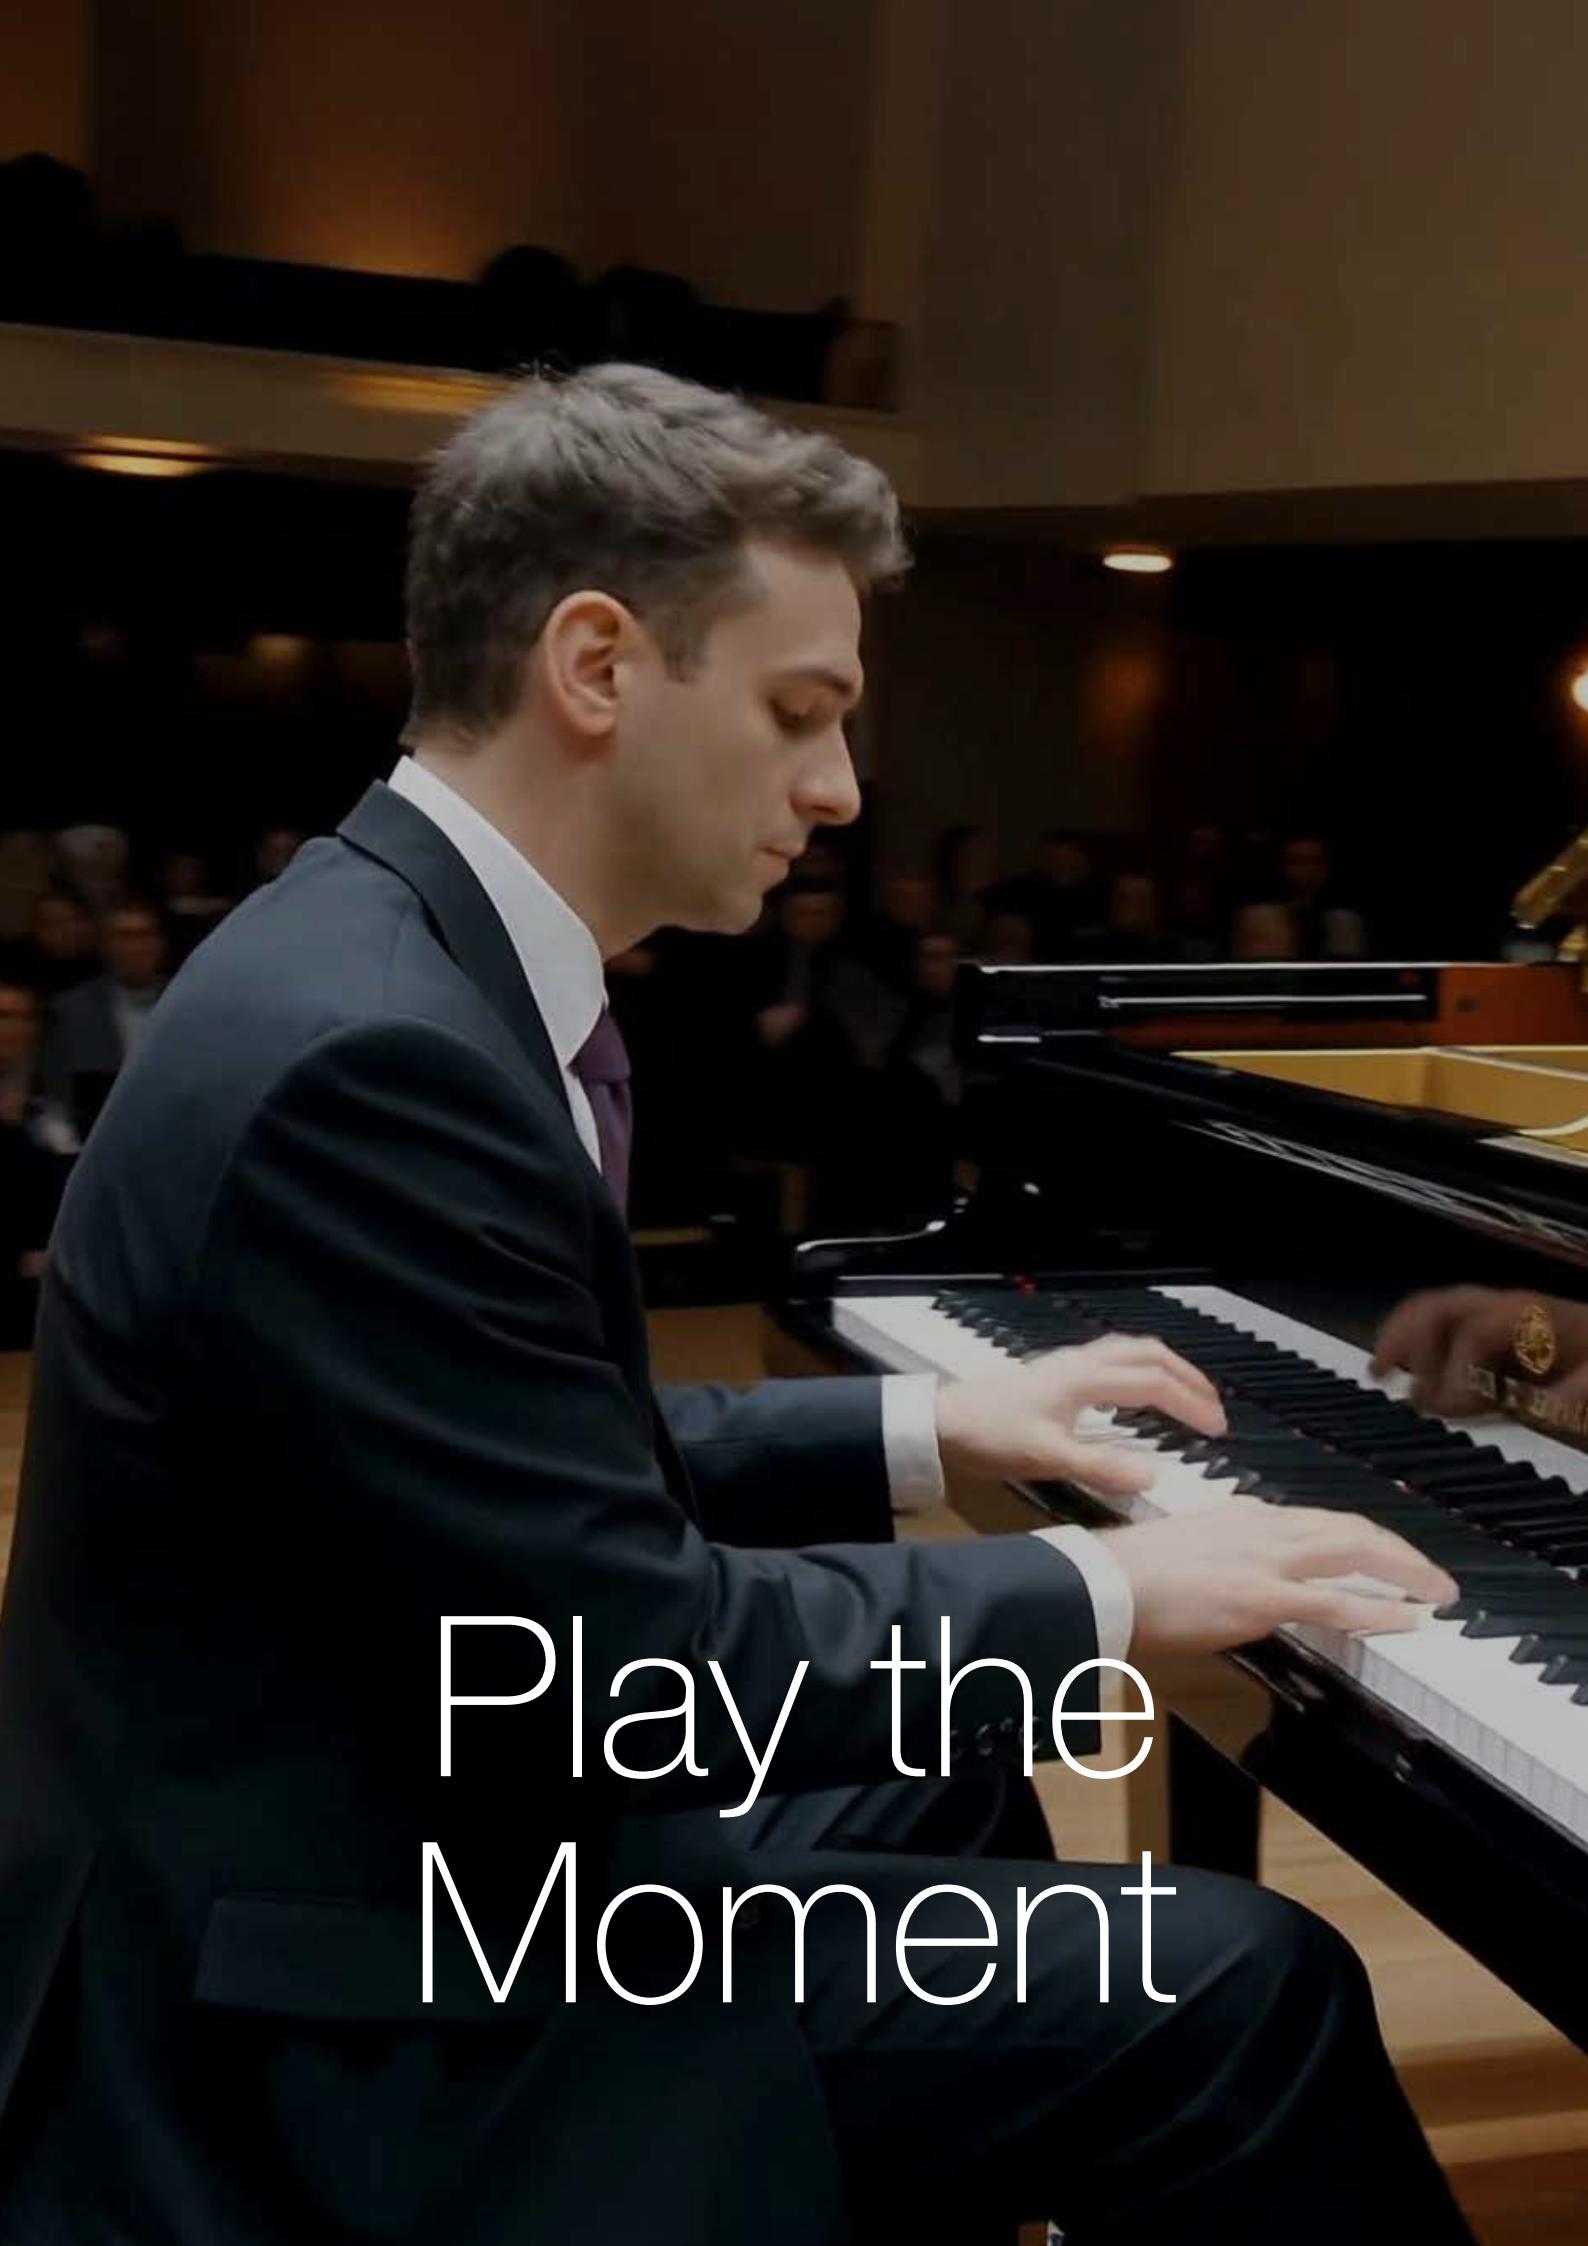

A professional pianist in a dark suit and white shirt is captured in profile, playing a grand piano. The setting is a dimly lit concert hall with warm lighting and a visible audience in the background. The pianist's hands are positioned on the keys, and the piano's lid is open, revealing the internal mechanism.

Play the
Moment

Karaoke Bluetooth Speakers

2x8" 1100W Portable Speaker

- With 2 wireless microphones and wired microphone support
- DSP Speaker with two 8" active woofers and sound processor
- BT • TWS
- Connectivity options: AUX, USB, Micro SD, and BT
- FM Radio • Digital recording capability
- Wired microphone input with volume and echo controls
- Large LED display
- AUX input
- 6.3mm PL input (for guitar), with volume control
- Bass and treble control
- Woofer with RGB lighting effects
- Dual power sources: built-in lithium battery with up to 8 hours of playback and external transformer
- IR remote control included



Specifications:

Power: 1100W
 Woofer: 2x8"
 Tweeter: Horn Tweeter
 Frequency Range: 48Hz–20kHz ±3dB
 Sensitivity: 88dB ±3dB
 Impedance: 4Ω
 Power Source 1: DC 12V 7500mAh
 Power Source 2: DC 15V 4A

PACHA

2x8" 1250W Portable Speaker

- With 2 wireless microphones
- DSP Speaker with two 8" active woofers and sound processor
- Bluetooth • TWS
- Connectivity options: AUX, USB, Micro SD, and BT
- FM Radio • Digital recording capability
- Wired microphone input with volume and echo controls
- Large LED display
- AUX input
- 6.3mm PL input (for guitar) with volume control
- Bass and treble control
- Woofer with RGB lighting effects
- Dual power sources: built-in lithium battery with up to 8 hours of playback and external transformer
- IR remote control included



Specifications:

Power: 1250W
 Woofer: 2x8"
 Tweeter: Horn Tweeter
 Frequency Range: 48Hz–20kHz ±3dB
 Sensitivity: 88dB ±3dB
 Impedance: 4Ω
 Power Source 1: DC 12V 7500mAh
 Power Source 2: DC 15V 4A

LAVO

2x10" 1400W Portable Speaker

- With 2 wireless microphones
- DSP Speaker with two 10" active woofers and sound processor
- BT • TWS
- Connectivity options: AUX, USB, Micro SD, and BT
- FM Radio
- Digital recording capability
- Wired mic input with volume and echo controls
- Large LED display
- AUX Input
- 6.3mm PL input (for guitar), with volume control
- Bass and treble control
- Woofer with RGB lighting effects
- Dual power sources: built-in lithium battery with up to 8 hours of playback and external transformer
- IR remote control included

Specifications:

Power: 1400W
 Woofer: 2x10"
 Tweeter: Horn Tweeter
 Frequency Range: 48Hz–20kHz ±3dB
 Sensitivity: 88dB ±3dB
 Battery: DC 12V 7500mAh



ESCAPE

Powered PA Bluetooth Speakers

300W Bluetooth PA System with 2 wireless microphones

PMW-3012



**300W
POWERFUL**

PRO

Specifications:

2-Way PA System
Power: 300W
Woofer: 12"
Horn Tweeter: 1"
Frequency Range: 48Hz–20kHz
Sensitivity: 88dB ±3dB

Dimensions (cm): 37.5 × 31 × 58.5

- 2 PL Inputs
- Dual power sources
- Telescopic carry handle
- IR remote control
- Rechargeable battery
- Battery status indicator 12V/7A
- Mic priority: Music volume automatically decreases when speaking into microphone

- Bluetooth
- TWS
- Large digital display
- USB and Micro AUX SD inputs
- FM Radio
- 5-Band graphic equalizer
- RCA OUT output
- Instrument input with volume control

500W Bluetooth PA System with 2 wireless microphones

PMW-4412



**500W
POWERFUL**

NEW

Specifications:

2-Way PA System
Power: 300W
Woofer: 12"
Tweeter: 1"
Frequency Range: 48Hz–20kHz
Sensitivity: 88dB ±3dB

Dimensions (cm): 37.5 × 31 × 58.5

- RCA output
- 5-Band equalizer panel
- Battery status indicator light
- Convenient retractable handle
- Durable wheels
- IR remote control
- 2 UHF Wireless microphones
- Bluetooth 5.4V
- TWS

- Large LCD display
- USB and card slot output
- AUX Input
- Wired microphone input
- Microphone priority feature
- Single guitar input

400W Bluetooth PA System with 2 wireless microphones

PMW-3015



**400W
POWERFUL**

**BEST
SELLER**

Specifications:

2-Way PA System
Power: 400W
Woofer: 15"
Horn Tweeter: 1"
Frequency Range: 48Hz–20kHz
Sensitivity: 88dB ±3dB

Dimensions (cm): 44 × 33.5 × 70

- 2 PL Inputs
- Dual power sources
- Telescopic carry handle
- IR remote control
- Rechargeable battery
- Battery status indicator 12V/7A
- Mic priority: Music volume automatically decreases when speaking into microphone

- Bluetooth
- TWS
- Large digital display
- USB and Micro AUX SD inputs
- FM Radio
- 5-Band graphic equalizer
- RCA OUT output
- Instrument input with volume control

600W Bluetooth PA System with 2 wireless microphones

PMW-4415

600W Bluetooth PA System with 2 wireless microphones



**600W
POWERFUL**

NEW

Specifications:

2-Way PA System
Power: 600W
Woofer: 15"
Tweeter: 1"
Frequency Range: 48Hz–20kHz
Sensitivity: 88dB ±3dB

Dimensions (cm): 44 × 35.5 × 70

- RCA output
- 5-Band equalizer panel
- Battery status indicator light
- Convenient retractable handle
- Durable wheels
- IR remote control
- 2 UHF Wireless microphones
- Bluetooth 5.4V
- TWS

- Large LCD display
- USB and card slot output
- AUX Input
- Wired microphone input
- Microphone priority feature
- Single guitar input

15" 400W RMS Powered Speaker for Large Spaces

PSX-15400



- Amplification: CLASS A/B
- Bluetooth
- Digital display
- FM Radio
- 5-Band graphic equalizer
- Memory card and USB inputs
- LINE IN, RCA / XLR Input
- 3 Outputs
- Microphone inputs
- Instrument input
- Voltage selection switch
- IR remote control
- Stand socket, carry handle

Specifications:

RMS: 400W
Woofer: 15"
Tweeter: 1 3/4"
Magnet: 80oz

Dimensions (cm): 48 x 72 x 32

Weight: 21 kg

400W



15" 500W RMS Powered Speaker for Large Spaces

PSX-15500



- Amplification: CLASS D
- Bluetooth
- Digital display
- FM Radio
- 5-Band graphic equalizer
- Memory card and USB inputs
- LINE IN, RCA / XLR Input
- 3 Outputs
- Microphone inputs
- Instrument input
- Voltage selection switch
- IR remote control
- Stand socket, carry handle

Specifications:

500W RMS
Woofer: 15"
Tweeter: 1 3/4"
Magnet: 60oz

Dimensions (cm): 45 x 48.5 x 76

Weight: 24.2 kg

500W

DSP



Microphones

Set of 2 Portable UHF Wireless Microphones

VOCALAI-202



- 50 Meter transmission range
- Premium capsule, designed for vocalists
- Receiver with rechargeable battery
- 10 Mic frequencies
- Hard case

Specifications:

UHF Frequency: 498–510 MHz
Frequency Response: 60Hz–15kHz (+0/-1.5dB)
Total Harmonic Distortion: <0.06% for clear and pure sound quality
Signal-to-Noise Ratio: >100dB, ensuring clear audio output
Receiver Dimensions: 84 x 25 x 35 mm
Microphone Dimensions: 50 x 50 x 250 mm
Total Weight: 1.4 kg

Professional Handheld PTT Microphone

PTT-15



- Designed for use in emergency/public address systems, for short announcements, and communications
- Specially attuned to the speech frequency range for clear & distortion-free sound
- Connects via 6.3mm metal PL plug and coiled cable
- Large & tactile PTT (push-to-talk) button for maximum convenience
- Includes bracket for mounting the microphone in an emergency cabinet or elsewhere near the user
- Easy & convenient use, quick connection; durable in intensive working conditions

Specifications:

Frequency Response: 200Hz–5kHz
Sensitivity: -76dB (at 500Ω) / -62dB (at 50kΩ)
Impedance: 500Ω

Desktop PTT Microphone

PTT-25



- Specially attuned to the speech frequency range for clear & distortion-free sound
- Stable and durable base, highly flexible gooseneck
- Elegant design for use in presentations or public speaking
- Easy & convenient use, quick connection; durable
- Includes 1-meter cable in the package

Specifications:

Microphone Type: Dynamic
Impedance: 600Ω ±30%
Sensitivity: 72 ±3 dBV/Pa
Frequency Range: 582–300 MHz

Wireless Desktop PTT Microphone

PTT-30



- Specially attuned to the speech frequency range for clear & distortion-free sound
- Stable and durable base, highly flexible gooseneck
- Elegant design for use in presentations or public speaking
- Easy & convenient use, quick connection; durable
- Includes 1-meter cable in the package

Specifications:

Microphone Type: Dynamic
Impedance: 600Ω ±30%
Sensitivity: 72 ±3 dBV/Pa
Frequency Range: 582–300 MHz

Home Theater Speakers

Floor-standing Loudspeakers



Features:

- Two 6.5" woofers combine to provide realistic sound distribution
- Minimal distortion
- 1" silk dome tweeter with oil cooling system for crystal clear highs
- Powerful 220W output; robust & controlled audio
- Piano finish worthy of any setting

SUPERNova 5F

Specifications:

Power Output- 220 Watts
Frequency Response: 42Hz-20KHz
Impedance: 8 Ohm
Driver Complement: 2 Way- DRAV FIG
Woofers: 2x6.5"
Tweeter: 1"
S/N Ratio: 92 db
Product Dimensions: 81 x 33 x 29cm
(31 x13 x 11.5in)

Floor-standing Loudspeaker



Features:

- Three 6.5" woofers provide realistic sound distribution
- Minimal distortion
- 1" silk dome tweeter with oil cooling system for crystal clear highs
- Powerful 250W output; robust & controlled audio
- Piano finish worthy of any setting

SUPERNova 8F

Specifications:

Power Output- 250W
Frequency Response: 42Hz-20KHz
Impedance: 8 Ohm
Driver Complement: 2 Way- DRAV FIG3/6.5
Woofers: 3x6.5in
Tweeter: 1in
S/N Ratio: 92 db
Product Dimensions: 81 x 33 x 29cm

Surround Speaker



Features:

- 5.25" Woofer provides realistic sound distribution
- 1" Silk dome tweeter with oil-cooling system for crystal-clear highs
- Powerful 2-Way, 140W output provides balanced audio
- Piano finish worthy of any setting

SUPERNova S

Specifications:

Power Output: 140W
Frequency Response: 65Hz-20KHz
Crossover Frequency: 3800Hz
Sensitivity: 89dB
Impedance: 8 Ohm
Driver Complement: 2-Way DRAV FIG 3/6.5
Woofers: 1x5in midwoofer
Tweeter: 1in
Product Dimensions: 31 x 18 x 19cm

Center Speaker



Features:

- Two 5.25" woofers provide realistic sound distribution
- Minimal distortion
- 1" Silk dome tweeter with oil-cooling system for crystal-clear highs
- Magnetically shielded drivers eliminate interference from nearby electronic components
- Powerful 3-Way, 150W output provides balanced sound distribution
- Piano finish worthy of any setting

SUPERNova C

Specifications:

Power Output: 150W
Frequency Response: 60Hz-20KHz
Crossover Frequency: 3800Hz
Sensitivity: 89dB
Impedance: 8 Ohm
Driver Complement: 2 Way- DRAV FIG
Woofers: 2x5.25in midwoofer
Tweeter: 1in
Product Dimensions: 16 x 46 x 19cm
Product Weight: 4kg (9lbs)

5.25" Ceiling Bell Speaker with 360° Uniform Sound Distribution

PREMIUM LINE

BLYSS BELL



- Bell speaker with an acoustic resonance enclosure to enhance bass frequencies music volume
- Modern/architectural design that blends in aesthetically in any space and in projects with high aesthetic requirements
- Premium finish: magnetic grill with black fabric + glossy RED PIANO painted enclosure
- Perfect for installation in restaurants, bars, shops, meeting rooms, hospitality venues, halls, and spaces with high ceilings
- Dynamic installation may allow adjustment of speaker height and sound dispersion

Specifications:

Woofer: 5.25" | Tweeter: 0.75"
Amplifier Power: 110W
Frequency Response: 65Hz–20kHz ±3dB
Impedance: 8Ω
Sensitivity: 89dB ±3dB
Crossover: 12dB
Speaker Cable: 3 meters – included
Speaker Diameter: 16 cm
Weight: 1.22 kg
Speaker Color: Glossy RED PIANO

3.5" Ceiling Bell Speaker with 360° Uniform Sound Distribution

PREMIUM LINE

BLYSS MINI



- Bell speaker with an acoustic resonance enclosure to enhance bass frequencies music volume
- Modern/architectural design that blends in aesthetically in any space and in projects with high aesthetic requirements
- Premium finish: magnetic grill with black fabric + glossy PIANO painted enclosure
- Perfect for installation in restaurants, bars, shops, meeting rooms, hospitality venues, halls, and spaces with high ceilings
- Dynamic installation may allow adjustment of speaker height and sound dispersion

Specifications:

Woofer: 3.5"
Dome Tweeter: 0.5"
Amplifier Power: 100W
Frequency Response: 120Hz–22kHz ±3dB
Impedance: 8Ω
Sensitivity: 90dB ±3dB
Crossover: 12dB
3-meter speaker cable included
Speaker Diameter: 11.5 cm
Weight: 0.86 kg
Finish: Black or White PIANO (choice available)

3.5" 2-Way Spherical Hanging Speaker

PREMIUM LINE

BLYSS BALL



- Spherical speaker with a premium fabric grill and glossy PIANO finish, ideal for luxury interiors
- Powerful, magnet-based multi-directional rotation for adjustment at precise angles
- Suitable for niches and compact spaces.
- Amazing sound quality in a compact form-factor.

Specifications:

Woofer: 3" | Dome Tweeter: 0.5"
Amplifier Power: 100W
Frequency Response: 120Hz–22kHz ±3dB
Impedance: 8Ω
Sensitivity: 90dB±3dB; Crossover: 12dB±2dB
Speaker Diameter: 11.5 cm
Maximum Height Including Mount: 14 cm
Weight: 0.88 kg
Color: Black or White (choice available)

Sound Bars

2.1CH Soundbar

ULTRA 21100



Features:

- BT 5.0
- Transducer: 2.25"/8Ω 15W x 2 + 2.25"/8Ω 25W Woofer x 2
- Audio output: 2.1CH
- 3.5mm Aux in / RCA (Aux) in
- USB input
- Optical
- HDMI™ (Arc)
- LED display
- Remote control

Specifications:

Rated Power: 80W
Frequency Response: 70Hz-20kHz
Transducer: 2.25" full range x 2pcs +2.25"
Woofer x 2 pcs
Total Harmonic Distortion: <1%
Signal to Noise Ratio: >/= 80dB.
Product Dimensions: 810x102x70 mm

2.1CH Dolby™ Soundbar

ULTRA 21150D



Features:

- 3.5mm AUX input
- HDMI™ (Arc) input
- Optical input / USB input
- Wireless BT connection
- LED display
- Matte Black finishing
- Digital Amplifier with DSP
- Remote control

Specifications:

Output Power: 130W
Frequency Response: 70Hz-20kHz
Transducer: 2.5"/4Ω 25W x 2 pcs +3.5"/8Ω 40W Woofer x 2 pcs
Total Harmonic Distortion: <1%
Signal to Noise Ratio: >/= 105dB.
Product Dimensions: 940 x141x 78 mm

Subwoofers

10" 150W Subwoofer



Features:

- Pure subwoofer that allows you to experience the clear bass of your favorite music as it was intended.
- Massive amplifiers provide the right combination of stability and power even at the lowest frequencies and highest volumes, drenching you with an all encompassing splash of sound.

SN10 SUB

Specifications:

Power Output: 150W
Frequency Response: Adjustable 40Hz ~180Hz
Impedance: 8 ohm
Power Supply: 110/220V
Connections: RCA Connector
Product Dimensions: 33.5 x 29 x 36 cm

12" 200W Subwoofer



Features:

- Pure subwoofer that allows you to experience the clear bass of your favorite music as it was intended.
- Massive amplifiers provide the right combination of stability and power, even at the lowest frequencies and highest volumes, fully enveloping your space with sound.

SN12 SUB

Specifications:

Power Output: 200W
Frequency Response: Adjustable 40Hz ~180Hz
Impedance: 8 ohm
Power Supply: 220/240V
Connections: RCA
Product Dimensions: 43.5 x 40 x 43.5 cm

10" Active Professional Subwoofer



Features:

- Max Power: 250W
- Function: RCA/XLR input
- Input voltage: 110-240V/50-60Hz
- Accessories: 2 Audio lines (1 to 2, 2 to 2)
- Carton size: 405 mm x 425 mm x 415mm

Specifications:

Speaker power in ohmic mode: 150W
Impedance: 4Ω
Woofers size : 10"
Frequency Response: 30Hz~200Hz
Sensitivity: 90dB ±3dB
Dimensions: L330mm x W345mm x H340mm
Weight: 11.5kg

450W Passive Subwoofer

MSUB-12

PREMIUM LINE



Power Output: 450W
Subwoofer: 12"
Tweeter: 1" Voice Coil + Horn
Impedance: 8Ω
Frequency Response: 20Hz~18kHz
(±3dB)
Finish: Black
Dimensions (cm):
H 45.5 x W 37.2 x D 45.7

500W Passive Subwoofer

MSUB-15

PREMIUM LINE



Power Output: 500W
Subwoofer: 15"
Impedance: 8Ω
Frequency Response: 45Hz~180Hz
(±3dB)
Finish: Black
Dimensions (cm):
H 45.5 x W 37.2 x D 45.7

350W Active Subwoofer

PS-111

PREMIUM LINE



Power Output: 350W RMS
Subwoofer: 12"
Nominal Impedance: 4Ω
Frequency Response: 25Hz~200Hz
Inputs: RCA / XLR
Finish: Black
Dimensions (cm):
H 49.5 x W 37 x D 46.5

Turntables

Bluetooth Suitcase Turntable with Built-in Stereo Speakers

Harper HRT-8



- 3 Speeds: 78, 45, BT 33.3 RPM
- Compatible with 10", 12", and 7" records
- Bluetooth 5.0 connectivity
- Built-in stereo speakers: 3 x 2W
- High-quality wooden resonance box
- Ceramic cartridge ensures high-quality playback and protects records from scratches
- Quality tonearm with lift handle
- RCA output to connect to receiver, powered speaker, computer, etc.
- AUX input: 3.5mm
- Suitcase cover included
- Finish colors: Matte Black, Brown Leather, Retro Turquoise, Vintage Pink, Lilac Purple

Specifications:

Drive type: Belt Drive
Power source: 5V/1A adapter
Dimensions (cm): 12 x 26 x 35

Professional Automatic Turntable with Audio Technica Cartridge and Dust Cover

Harper HRT-16



- 2 Speeds: 45, 33.3 RPM
- Compatible with 10", 12", and 7" records
- Professional Audio-Technica cartridge (Model: 3600)
- High-quality metal tonearm with adjustable counterweight for precise, high-performance playback
- RCA output to connect to receiver, powered speaker, computer, etc.
- USB output for recording and converting vinyl to MP3 files
- One-button start; automatic stop
- Finish: Night Glossy Luxury

Specifications:

Drive type: Belt Drive
Platter diameter: 12"
Power source: 12V/1A adapter
Dimensions (cm): 36 x 39.6 x 9.4



audio-technica

Professional Turntable with Audio-Technica Cartridge, 80W Stereo Shelf Speakers and Dust Cover

Harper HRT-24



Specifications:

Drive type: Belt Drive
Platter diameter: 11"
Speakers: 2 x 40W
Power source: 12V/2.4A adapter

Dimensions (cm):

Turntable: 41.8 x 35.6 x 12.5
Speakers: 16 x 15.8 x 24.9

- 2 Speeds: 45, 33.3 RPM
- Compatible with 10", 12", and 7" records
- Professional Audio-Technica cartridge (Model 3600)
- High-quality metal tonearm with adjustable counterweight for precise, high-performance playback
- Bluetooth 5.0 allows wireless music playback from the turntable system
- 40 x 2W Stereo shelf speakers: Wooden resonance boxes with woofer for deep bass and tweeter for clear highs (each), delivering high-quality sound
- RCA output connect to receiver, powered speaker, computer, etc.
- PHONO output for direct connection to an amplifier with a turntable input
- USB output for recording and converting vinyl to MP3
- 11" metal platter
- Shock absorber ensures clean sound; protects records from scratches
- Finish: Retro wood



audio-technica

Audio Accessories

Transmitter and Receiver Set: 50 Meter Range

RXT-A50



- For audio and subwoofer signal transmission
- Range: up to 50 meters using a network cable
- Transmits audio wirelessly from any RCA audio source: player, tablet, TV, receiver, smartphone, turntable, etc.
- Allows daisy-chaining of 2 amplifiers wirelessly
- Supports wireless connection of an active subwoofer to existing system
- Digital wireless link at 5.2GHz / 5.8GHz frequencies

Near-Far Microphone Extender Set with Wall Flush Mount

RXT-M30



- Extends microphone signal via standard network (CAT5) cable—up to 300 meters
- Designed for PA systems or installations where the microphone is more than 15 meters from the amplifier
- Balanced XLR connection ensures clear, noise-free audio transmission
- Includes +12 VDC phantom power switch for use with dynamic or condenser microphones
- Features 3.5 mm (AUX) input for quick connection of external audio devices to the amplifier
- Near unit housed in an elegant recessed wall panel, ideal for public or visible installations
- Input-selector knob allows easy switching between XLR and AUX sources

Digital Audio Extender Kit

RXT-D200



- Extends optical or coaxial digital audio signals up to 200 meters over CAT5e/CAT6 cabling
- Ideal for systems where the audio source is located far from the amplifier or receiver
- Supports stereo and 5.1-channel home theater audio formats with pristine signal quality
- Includes an infrared window for seamless remote-control operation
- Compatible with a wide range of digital audio formats for both home and professional installations

RCA Audio Extender

RXT-R75



- Extends RCA audio signals up to 75 meters over a CAT5 network cable
- Ideal for systems where the audio source is located far from the amplifier or receiver
- Transmits stereo audio

3.5mm Audio Extender

RXT-P75



- Extends 3.5mm PL audio signals up to 75 meters over a CAT5 network cable
- Ideal for systems where the audio source is located far from the amplifier or receiver
- Transmits stereo audio

Stereo Preamplifier for Turntable

TC-500



- Enables turntable-to-amplifier connection
- Adapts turntables to connect to active sound systems without a dedicated phono input
- Ideal for high-quality analog audio
- Suitable for private use, or in music clubs, bars, cafés
- Precise signal processing
- High signal-to-noise ratio preserves audio quality
- 34dB gain for optimal signal amplification
- Compact and lightweight design
- Powered by 9V-DC battery

Compact Stereo Amplifier

CA-B45



- 45W per channel
- Integrated Bluetooth and wired connection for an active subwoofer
- Suitable for offices, waiting rooms, VIP rooms, patios, etc.
- Ultra-compact design for aesthetic and minimalistic integration into your space
- Subwoofer output allows full-range sound enhancement
- CSR Bluetooth 4.1 with up to 50 meters of wide reception range
- Class D amplifier, 45W RMS \times 2
- APTX encoding technology for high-quality audio transmission
- Quick operation capable via Voice Assistant

Compact Stereo Amplifier with Microphone Input

CA-M15



- Advanced audio amplifier with dynamic microphone and stereo audio inputs
- Suitable for small to medium-sized spaces
- Stereo audio line input and 6.3mm PL input for dynamic microphone connection
- Class D amplifier, 15W RMS \times 2 per channel
- Built-in speaker protection to safeguard audio equipment
- Efficient power source—operates on 12V-DC / 2A for stable performance

Compact Stereo Amplifier with Bluetooth, Microphone Input, and Remote Volume

CA-M30BT

Control



- Includes a separate volume unit for controlling audio level from a different location connected via network cable
- Multiple inputs including dynamic microphone, AUX, and Bluetooth
- Class-D amplifier, 30W RMS \times 2
- Built-in speaker protection system to safeguard equipment integrity

Specifications:

Amplifier Type: Class D
Power Output: 30W RMS \times 2
Impedance: 4Ω
Mic Pre-Amp Gain: 40dB
THD+N: 0.1%
Product Dimensions (mm): 171x89x38
Power Supply: 24VDC

Flush-Mount Stereo Volume Controller with 11 Power Levels

VOLUME WALL 100V



The perfect high-quality solution for splitting and expanding audio zones in both new and existing systems. Suitable for residential and commercial use; in spaces such as restaurants, cafés, shops, offices, gyms, educational institutions, clinics, hospitals, hotels—any space that requires audio zoning.

- Suitable for connecting speakers with 70V–100V line transformers only
- Option to connect a pair of speakers for stereo sound
- 11 Fixed volume levels, for precise and easy audio control
- Clean & elegant appearance

- Installation depth: 4.7 cm
- Compatible with 3-gang junction box
- White panel finish
- Maximum Power: 50W
- Dimensions (cm): 7 x 12 x 8

Stereo Speaker Splitter for 2 Pairs of Speakers

TC-2



- Splits a single amplifier channel into 2 zones
- Zone-selector with options A / B / AB
- Configured for mounting the selector on a wall or counter
- Elegant design
- Maximum output of up to 100W per zone

Stereo Speaker Splitter for 3 Pairs of Speakers

TC-3



- Splits a single amplifier channel into 3 zones
- Zone-selector with options A / B / C / AB / BC / AC / ABC
- Elegant desktop design
- Maximum output of up to 100W per zone

Professional Stereo Speaker Controller for 4 Pairs of Speakers

SPLIT-42



Features:

- With Impedance Matching Mechanism for Protection and Amplifier System Safety
- Compatible with 4Ω–8Ω impedance speakers
- Maximum power: 150W
- Option to chain additional speaker controllers
- Ability to play music in all zones simultaneously or separately
- On/Off button for each zone
- Terminal connectors for quick and easy cable connection/disconnection
- Sturdy metal enclosure: elegant look and long-lasting durability
- Note: Not suitable for PA Amplifiers or line-transformer speakers

Dimensions (cm): 21.6 x 13 x 5.8

Professional Stereo Speaker Controller for 6 Pairs of Speakers

SPLIT-62



Features:

- With Impedance Matching Mechanism for Protection and Amplifier System Safety
- Compatible with 4Ω–8Ω impedance speakers
- Maximum power: 150W
- Option to chain additional speaker controllers
- Ability to play music in all zones simultaneously or separately
- On/Off button for each zone
- Terminal connectors for quick and easy cable connection/disconnection
- Sturdy metal enclosure: elegant look and long-lasting durability
- Note: Not suitable for PA Amplifiers or line-transformer speakers

Dimensions (cm): 28.6 x 13 x 5.8

Professional Stereo Speaker Controller for 8 Pairs of Speakers

SPLIT-82



Features:

- With Impedance Matching Mechanism for Protection and Amplifier System Safety
- Compatible with 4Ω–8Ω impedance speakers
- Maximum power: 150W
- Option to chain additional speaker controllers
- Ability to play music in all zones simultaneously or separately
- On/Off button for each zone
- Terminal connectors for quick and easy cable connection/disconnection
- Sturdy metal enclosure: elegant look and long-lasting durability
- Note: Not suitable for PA Amplifiers or line-transformer speakers

Dimensions (cm): 43.3 x 13 x 5.8

Professional Stereo Volume Controller for 4 Pairs of Speakers

VOLUME-4

The perfect, high-quality solution for splitting and expanding audio zones in both new and existing systems. Suitable for residential and commercial use; in spaces such as restaurants, cafés, shops, offices, gyms, educational institutions, clinics, hospitals, hotels—any space that requires audio zoning.



- Compatible with 4Ω–8Ω impedance speakers
- Includes option to connect 2 amplification sources
- Supports up to 4 pairs of speakers
- Option to chain additional speaker controllers
- Ability to play music in all zones simultaneously or separately
- On/Off button for each zone
- Push-terminal connectors for quick and easy cable connection/disconnection
- Sturdy metal enclosure: elegant look and long-lasting durability
- Note: Not suitable for PA Amplifiers or line-transformer speakers

Product Dimensions:

28.8 x 15.2 x 5.6 cm

Maximum Power:

150W per zone

Professional Stereo Volume Controller for 6 Pairs of Speakers

VOLUME-6

The perfect, high-quality solution for splitting and expanding audio zones in both new and existing systems. Suitable for residential and commercial use; in spaces such as restaurants, cafés, shops, offices, gyms, educational institutions, clinics, hospitals, hotels—any space that requires audio zoning.



- Compatible with 4Ω–8Ω impedance speakers
- Includes option to connect 2 amplification sources
- Supports up to 6 pairs of speakers
- Option to chain additional speaker controllers
- Ability to play music in all zones simultaneously or separately
- On/Off button for each zone
- Push-terminal connectors for quick and easy cable connection/disconnection
- Sturdy metal enclosure: elegant look and long-lasting durability
- Note: Not suitable for PA Amplifiers or line-transformer speakers

Product Dimensions:

43.8 x 15.2 x 5.6 cm

Maximum Power:

150W per zone

Speaker Cables

152 Meters - **OFC-14/2**

Full Copper Speaker Cables 2x14 AWG



High-Quality Copper Speaker Cable 2x14 AWG (2x2.1 mm²)

- Made of 100% oxygen-free copper to prevent corrosion
- Highly flexible jacket for professional and home installation
- Suitable for all wall types: concrete, drywall, wooden panels, etc.
- Compatible with all types of speakers: home theater systems, hanging, in-wall, outdoor, and more
- High-quality sound transmission over long distances
- Clear and rich audio quality

152 Meters - **OFC-16/2**

Full Copper Speaker Cables 2x16 AWG



High-Quality Copper Speaker Cable 2x16 AWG (2x1.31 mm²)

- Made of 100% oxygen-free copper to prevent corrosion
- Highly flexible jacket for professional and home installation
- Suitable for all wall types: concrete, drywall, wooden panels, etc.
- Compatible with all types of speakers: home theater systems, hanging, in-wall, outdoor, and more
- High-quality sound transmission over long distances
- Clear and rich audio quality

152 Meters - **OFC-16/4**

Full Copper Speaker Cables 4x16 AWG



High-Quality Copper Speaker Cable 4x16 AWG (2x1.31 mm²)

- Made of 100% oxygen-free copper to prevent corrosion
- Highly flexible jacket for professional and home installation
- Suitable for all wall types: concrete, drywall, wooden panels, etc.
- Compatible with all types of speakers: home theater systems, hanging, in-wall, outdoor, and more
- High-quality sound transmission over long distances
- Clear and rich audio quality

100 Meters - **CA-16/2**

Copper Coated Speaker Cables 16 AWG




Super Flex Copper Coated Speaker Cable 2x16 AWG (2x1.31 mm²)

- Highly flexible jacket for professional and home installation
- Suitable for all wall types: concrete, drywall, wooden panels, etc.
- Compatible with all types of speakers: home theater systems, hanging, in-wall, outdoor, and more
- High-quality sound transmission over long distances
- Cost-effective solution

100 Meters - **NFC-16/2**

Copper Coated Speaker Cables 16 AWG

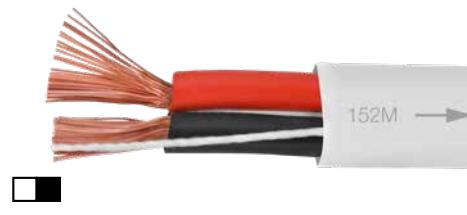

Super Flex Copper Coated Speaker Cable 2x16 AWG (2x1.31 mm²)

- Highly flexible jacket for professional and home installation
- Suitable for all wall types: concrete, drywall, wooden panels, etc.
- Compatible with all types of speakers: home theater systems, hanging, in-wall, outdoor, and more
- High-quality sound transmission over long distances
- Cost-effective solution

152 Meters - **WFC-14/2**

Waterproof Full Copper Speaker Cables



Professional Speaker Cable for Pulling – 2-Core Full Copper GWA41, Water-Resistant

- On reel with an easy-pull carton
- 152 meters
- Internal water-resistant protective layer
- Highly flexible CVP coating for easy pulling and quick stripping
- Meter markings/zone markings along the cable
- Available in black or white



Specifications:

2 x 14AWG (2.31mm² x 2)

152 Meters - **WFC-16/2**

Waterproof Full Copper Speaker Cables



Professional Speaker Cable for Pulling – 2-Core Full Copper GWA61, YYN Standard, Water-Resistant

- YYN standard, water-resistant
- On reel with an easy-pull carton
- 152 meters
- Internal water-resistant protective layer
- Highly flexible CVP coating for easy pulling and quick stripping
- Meter markings/zone markings along the cable
- Available in black or white



Specifications:

2 x 16AWG (1.31mm² x 2)

HDMI Cables – Silver Series

Custom Installation HDMI Cable

- High-speed data transmission – 18Gbps
- High Definition Signaling Interface (HDSI)
- Extra-flexible PVC jacket
- 100% corrosion-resistant
- Shielded construction to prevent interference
- Available in lengths: 1 / 2 / 3 meters

Models: DHD-1M / DHD-2M / DHD-3M



HDMI Cables – Gold Series

Professional HDMI Cable Series by DLX; 2.0 4K Standard. Cables are manufactured to the highest global quality and standards: HDCP2.2, FCC, RoHS, ATC, UL, ISO, CE.

100% Copper | 4K, 3D, 1080P | Supports ARC, HEC | 7.1 True HD Audio | Full Shielding | 4Kx2K 60Hz

Custom Installation HDMI Cable

- High-speed data transmission – 18Gbps
- 24K gold-plated connectors
- Extra-shielded PVC jacket
- 100% corrosion-resistant
- Tested and certified by ATC
- Shielded construction to prevent interference
- Compatible with HDCP 2.2, HDR10, 3D
- Available lengths: 1 / 2 / 3 / 5 / 7.5 / 10 / 15 meters
- Wire Gauge: 30AWG / 28AWG / 26AWG / 24AWG (depending on length)

Models: DHD-4K-1M / 2M / 3M / 5M–7.5M / 10M / 15M



HDMI Cables – Gold Series 8K

Professional HDMI Cable Series by DLX; 2.0 8K Standard. Cables are manufactured to the highest global quality and standards: HDCP2.2, FCC, RoHS, ATC, UL, ISO, CE.

100% Copper | 4K, 3D, 1080P | Supports ARC, HEC | 7.1 True HD Audio | Full Shielding | 8Kx2K 60Hz

Professional Custom Installation HDMI Cable

- High-speed data transmission – 18Gbps
- 24K gold-plated connectors
- Extra-shielded PVC jacket
- 100% corrosion-resistant
- Tested and certified by ATC
- Shielded construction to prevent interference
- Compatible with HDCP 2.2, HDR10, 3D
- Available lengths: 1 / 2 / 3 meters
- Wire Gauge: 24AWG

Models: DHD-4K2-1M / 2M / 3M



HDMI over Optical Fiber

FIBER OPTICAL HDMI

Reliable and stable solution for 24/7 operation; high-quality HD signal without interruptions; thin and flexible for easy threading!

High Speed Active Fiber Optical HDMI Cable

- Full HDMI 2.0 support with data transfer speeds up to 18Gbps and full 4K@60Hz support in all color formats – 4:4:4, 4:2:2, and 4:2:0 – for uncompromised image quality
- Ultra-thin cable diameter – 4.8 mm
- Pull head for easy installation even through 18 mm conduit
- No HDMI extender required
- Full support for HDCP 2.2, HDR, HDR10, ARC, CEC, EDID, 3D protocols

Models: DAOC-10-15M / 20-25M / 30M / 50M / 70M / 100M



HDMI 8K Cable (5, 10, 15, 20m available)


8K 10M HDMI

- 8K HDMI Fiber Optic cable is ultra high speed 48Gbps bandwidth, supporting 8K resolution, Dynamic HDR, and seamless 4K@120Hz playback.
- Universally compatible with PlayStation 5/4/3, Xbox Series X/S, Nintendo Switch, 8K/4K TVs, PCs, Blu-ray players, projectors, and more.
- HDCP2.2, 4:4:4, 16bit. It is compatible with all devices that adopt HDMI 2.1 standard and is backward compatible with previous versions, including HDMI 2.0, 1.4, 1.3, 1.2, and 1.
- Please connect the SOURCE end (PC/PS5/Xbox/Blu-ray) to your input device and the DISPLAY end (TV/monitor/projector) to your display. Incorrect connection will result in no signal output.
- 24K gold-plated connectors and high-purity bare copper conductors for superior signal transmission. The durable PVC jacket ensures flexibility and longevity, while advanced shielding minimizes interference to prevent black screens.

Specifications:

Type A for Source connection
Type D-A for Display connection
4C*OM3+1P+5
C V2.1 HDMI
OD 4.8mm cable
Zinc alloy shell
24K gold plated contact
Germany Silicom line Chipset inside
Length: 10M



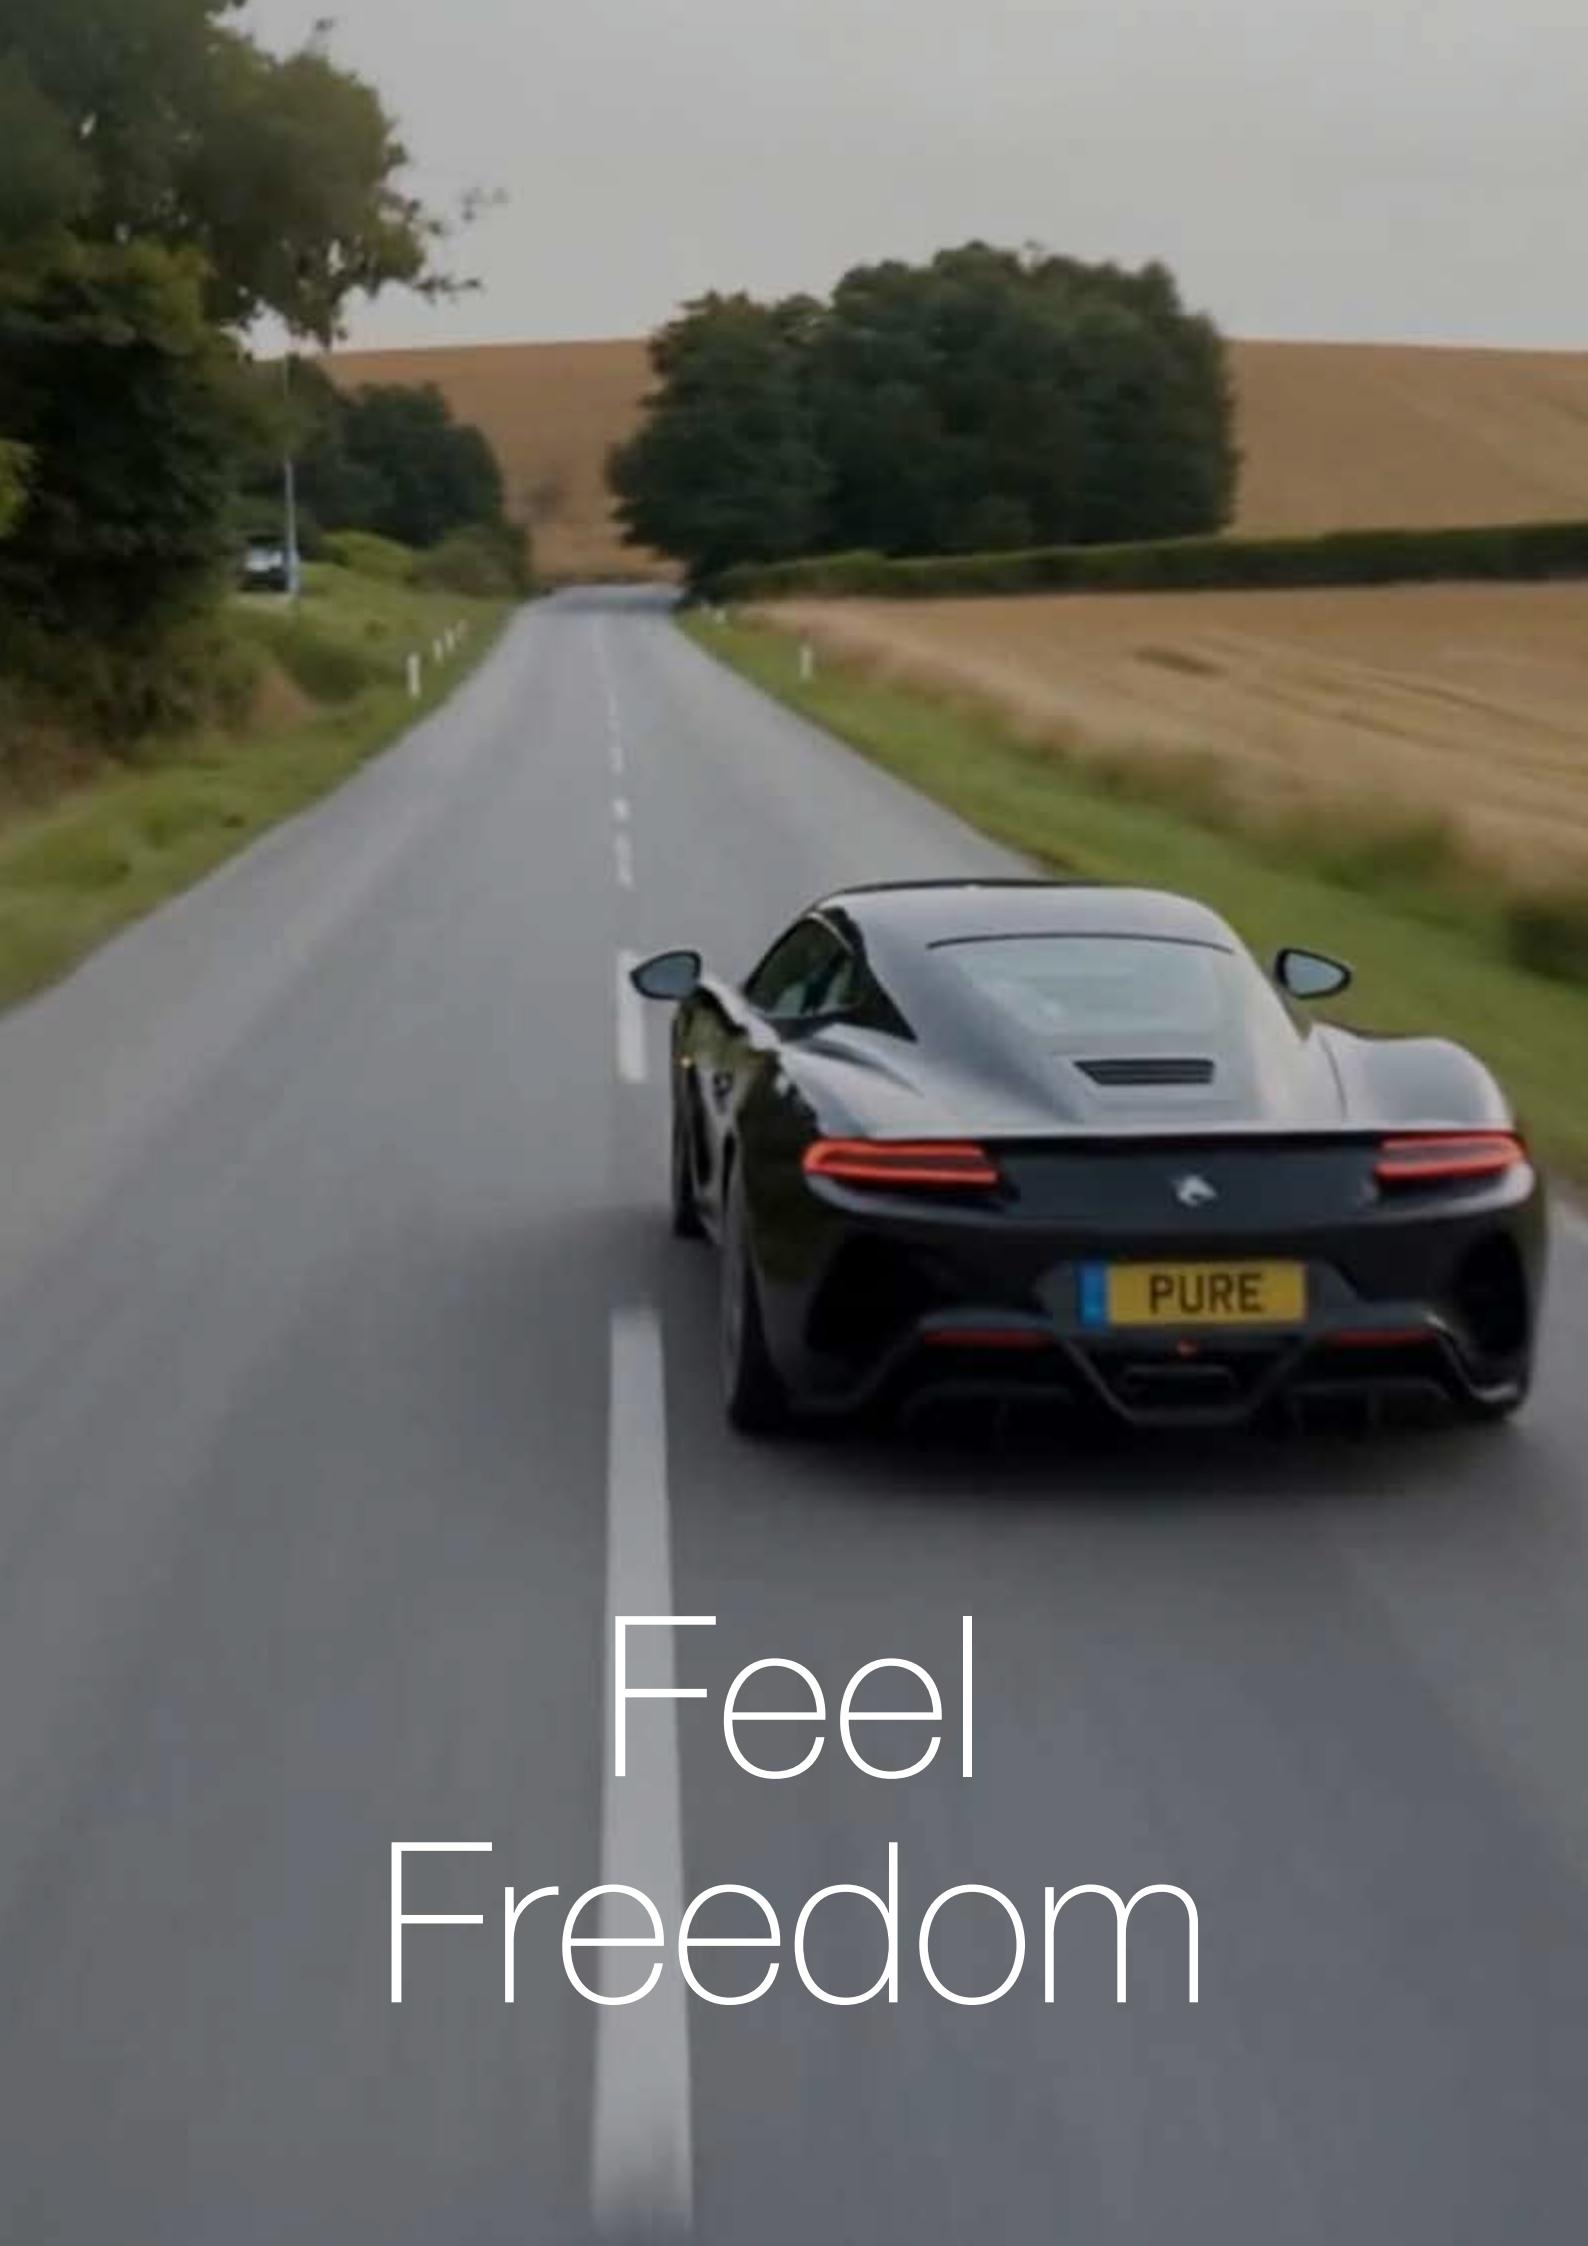

Feel
Freedom